



CRANES AND LIFTING EQUIPMENT

Hire a safe crane and lifting equipment at Preston Rentals

We have established ourselves as reliable partner in both the industrial and the building industry. A partner which delivers custom-made solutions fulfilling your needs and demands.

We understand the importance of delivering reliable equipment on time and securing a high level of operation without interruptions.

Our objective is to establish long-term cooperative relations based on trust, dependability and mutual success. We provide impeccable service and create a safe and efficient working environment for you.

With PRESTON RENTALS® as a partner we take you and your industrial and building projects to new heights. We are ready to deliver exceptional expertise and create lasting results which will make a difference.



Choose your equipment

Checklist for choice of equipment

Please consider the following conditions before choosing equipment.

Indoors or outdoors
You should choose electric cranes for indoor jobs.

Electric, battery or diesel
Is there access to electricity?

Placing
Stability is important for safety and comfort.

Obstacles
Check width, height, and radius in your work area.

Work height
At which height will you be working?
What reach do you need?

Lifting capacity
Amount of kg - weight of equipment, materials etc.

Type of work
Light or heavy work?

Do you need outriggers?
If the work has to be done on unstable or inclined surfaces, pressure area calculations should be made.

Permissions
Are permits required to use the crane?

Rental Period
Plan well in advance to ensure you get the right crane for the job.

Delivery of Equipment
How should the crane be transported?
Consider the weight on the trailer/truck.

Additional Equipment
Have you remembered extra cables, steel planks, derricks, tackles, chains, barriers, etc.?
Do ask us about additional equipment!

We are happy to assist you in choosing the right equipment!
When you hire equipment from us, you can be assured that it is in good condition and ready for use.
If you hire for an extended period, we regularly perform on-site inspections and maintenance.

Table of contents

| | |
|---|-----------|
| SuperCrane™ | 4 |
| C1 compact crane | 5 |
| SuperCrane™ XM800 | 6 |
| C4 compact crane | 8 |
| C6 compact crane | 9 |
| C10 compact crane | 11 |
| C30e compact crane | 13 |
| SuperCrane™ SC180 | 14 |
| SuperCrane™ EK400 | 16 |
| SuperGlassHandling™ | 18 |
| 320 KG SPIDER SUCTION | 19 |
| 320 KG REACH SUCTION | 19 |
| 135 KG 2 SUCTION CUP | 19 |
| 600 / 800 / 1000 KG Hoeflon suction | 19 |
| VIAVAC panels | 20 |
| VIAVAC glass | 22 |
| SuperGrab™ BX1000 | 24 |
| MultiTool | 26 |
| Crane Accessories | 28 |
| SuperElevate™ | 30 |
| Ganterud | 34 |
| Ganterud L3 | 36 |
| Ganterud L5 (PRO) | 37 |
| Ganterud L12 | 39 |
| Ganterud L20-3..... | 40 |
| SuperDeck® | 42 |
| SuperPropping™ | 46 |
| Contact and Services | 48 |

SuperCrane™

Multifunctional, robust
and compact cranes



Great prices for crane hire

At PRESTON RENTALS®, you can hire Denmark's best compact crane "to-go". It's possible to pick it up yourself, drive out, perform the work, and return it. We offer crane hire of compact cranes both with and without an operator.

Hire SuperCrane™ with easy control

When we offer compact crane hire, it's important to us that they are easy to operate. They are controlled via a remote control, similar to truck cranes. With the remote control, you can drive the crane's tracks and outriggers. This ensures complete control during manoeuvring and setup.

Once the crane is set up, you can control the crane safely and smoothly with millimetre precision using these remote controls. The remotes also come equipped with an information display that quickly provides an overview of the current lift – load weight, maximum lifting capacity, outreach, etc. Therefore, all our cranes are very easy to use, and crane hire has never been easier.

Are you interested in a quote for your next project?

Our competences are diverse, and we are passionate about helping you. You are always welcome to contact us for further questions. Naturally, we will also provide a non-binding quote for your task.



The small power centre C1 compact crane


The Hoeflon C1 Mini Crane lifts up to 550 kg and can access anywhere. It is electrically powered and can therefore be used indoors in enclosed spaces. It is ideal for positioning glass and steel beams.

SPECIFICATIONS

| | |
|--------------------------|--|
| Capacity: | 550 kg |
| Max. hoisting height: | 5,6 m og 4,4 m without options |
| Boom outreach: | 4,6 m og 3,3 m without options |
| Battery: | 24 V |
| Width: | 71,2 cm |
| Controls: | Remote control; proportional driving and lifting |
| Total weight: | 960 kg and 1060 kg with extra equipment |
| Wire winch: | 40 m |
| Hydraulic slewing range: | 136° |
| Load moment protection: | Overload protection at 90% / 100% |

EQUIPMENT


| | |
|---------------------|-----------------------|
| Converter: | 230 V / 24 V |
| Adjustable section: | 30° adjustment range |
| Winch: | 460 kg |
| Tracks: | Non-marking |
| Storage box: | 0,5 m x 0,3 m x 0,3 m |
| Boom: | 30° (up/down) |
| Work lighting: | LED |

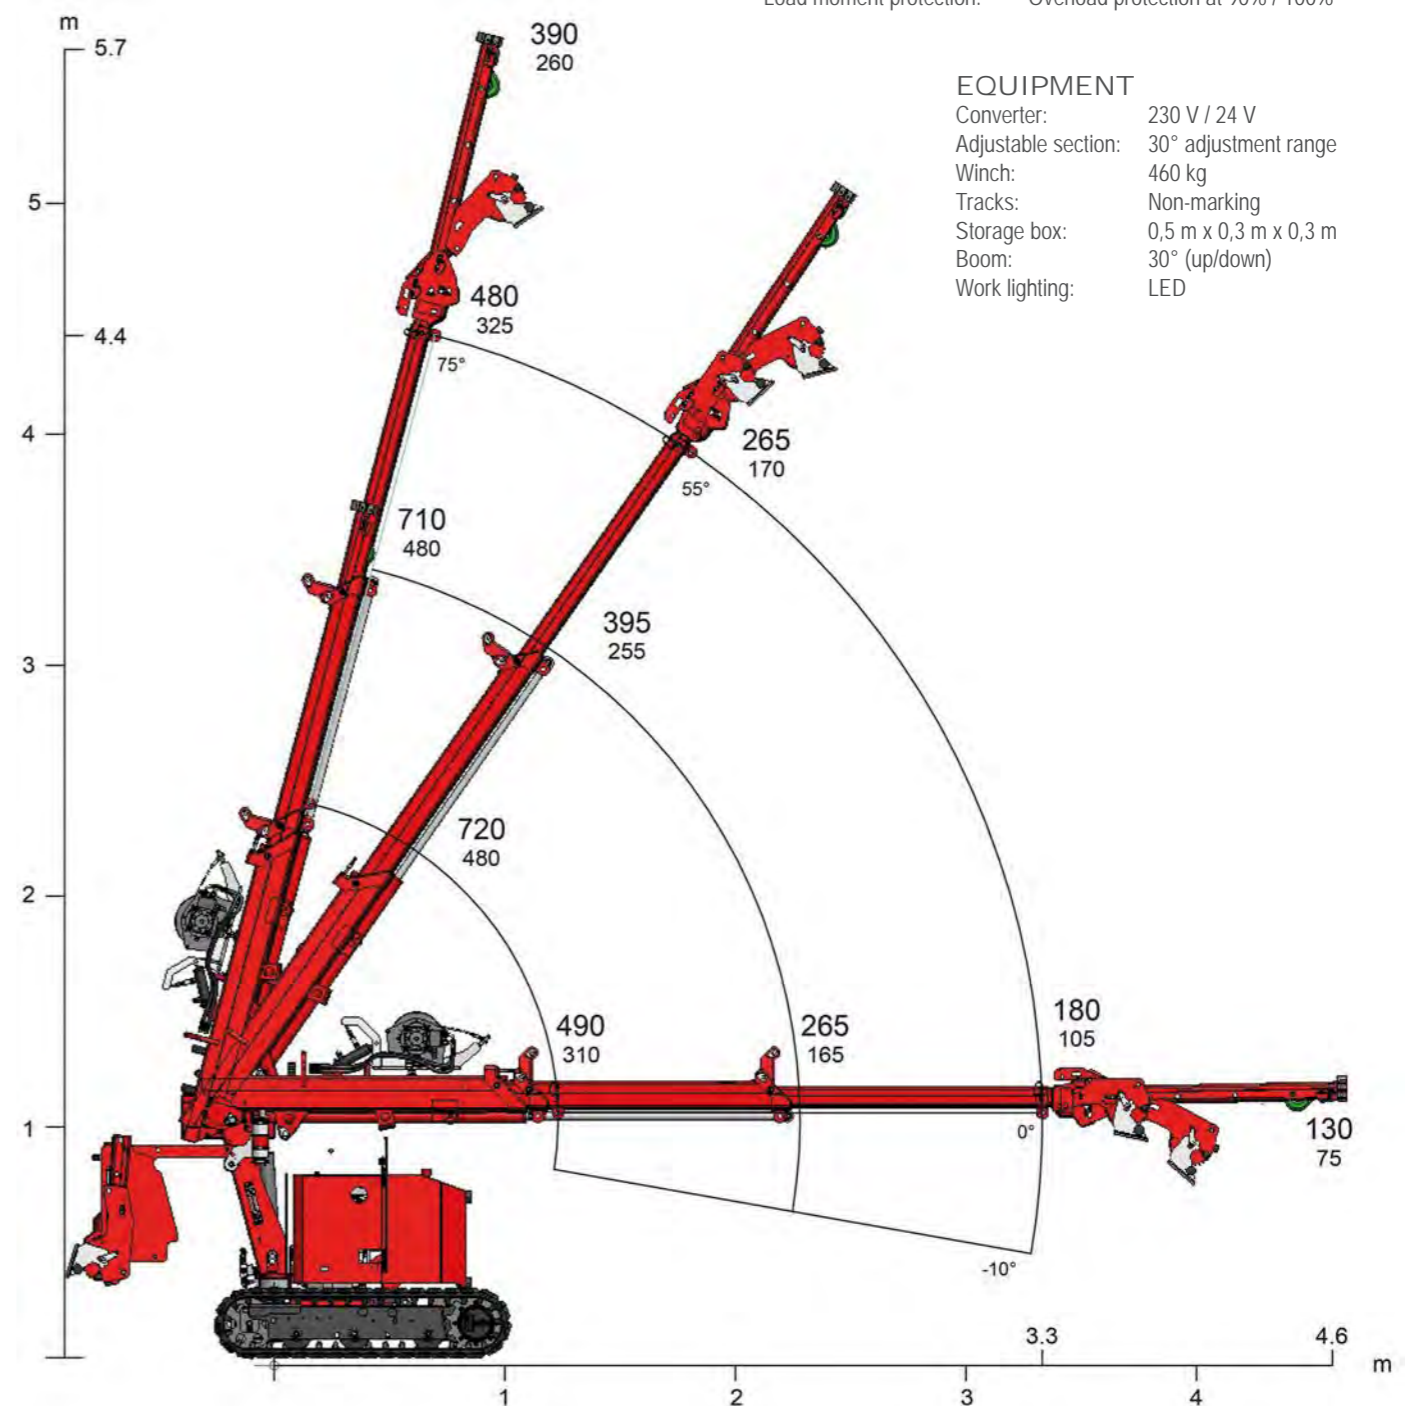

SuperCrane™ XM800

Lifting crane for easy positioning

SuperCrane™ XM800 crawler crane with Pick 'n' Carry function. It is a super flexible mini crane with many possibilities. A small assistant on the construction site to be used for both transport and crane function.

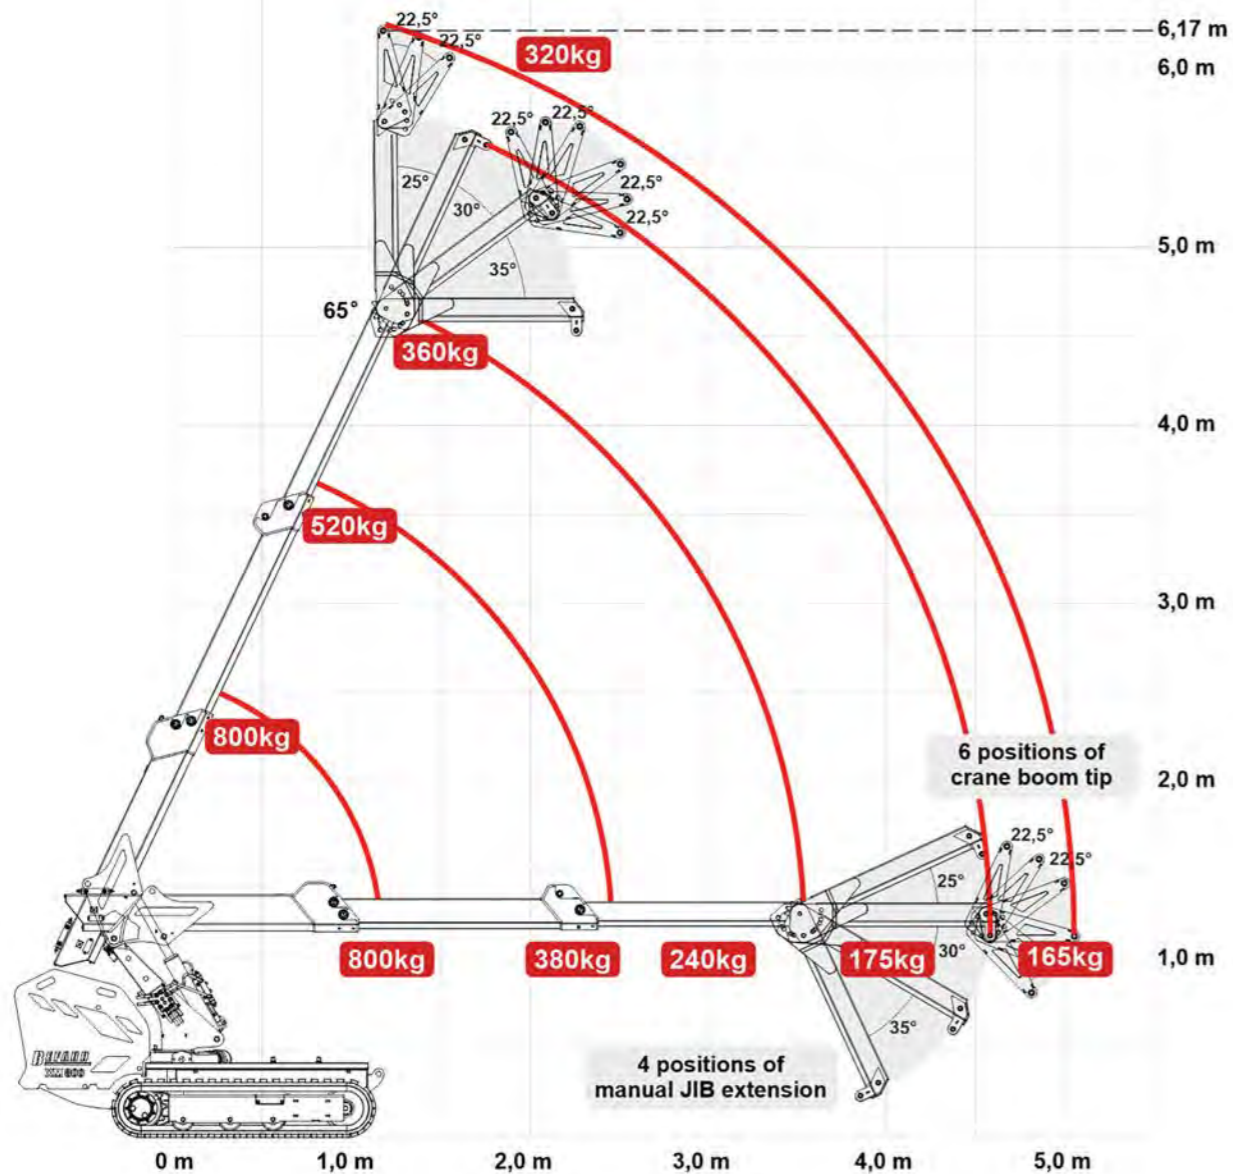

EQUIPMENT

- Winch capacity up to 500 kg
- 2 extension arms
- Detachable loading part
- Non-Marking tracks


TECHNICAL DATA

| | |
|-------------|---------|
| Own weight: | 1100 kg |
| Length: | 230 cm |
| Width: | 78 cm |
| Height: | 145 cm |


FEATURES

- Pick 'n' Carry function
- Extension tracks
- Remote control

All configurations of XM800 are equipped with a hook, which can be re-mounted on extra equipment if necessary.



Winch



Crane boom tip



Manual JIB extension

SPECIFICATIONS

| | |
|---------------------------|---|
| Maximum lifting capacity: | 800 kg |
| Transport of mini crane: | By car up to 3.5 t |
| Anti-overload system: | Yes |
| Hydraulic extensions: | 2 |
| Maximum vertical reach: | 6,17 m |
| Maximum horizontal reach: | 5,0 m |
| Hydraulic slewing range: | Rotation to the left and right 25° (all in all 50°) |

Remote control: Both for driving and operation of the crane.

Propulsion: Lithiumion batteries (possible direct connection to 230V/110V)



Remote control for SuperCrane™ XM800

Remote control with control for both driving and operation of the crane, including start-stop motor.



SuperCrane™

HIRE A SAFE CRANE FOR HEAVY LIFTING

We have a modern, comprehensive, and well-maintained crane fleet for hire, consisting of the market's best compact cranes and construction cranes in a wide range of models and capacities.

We exclusively offer the market's best quality. We are, of course, happy to assist you, free of charge, with measurements and solution proposals, ensuring you get the right crane for your task.



Available as both a hybrid (diesel + electric) and as a pure Power battery crane.

Ultra-compact and robust crane C10 compact crane

The Hoeflon C10 Mini Crane has an enormous lifting capacity and three speed levels, making it exceptionally manoeuvrable. It is the perfect choice for heavier tasks within industrial and steel construction.


SPECIFICATIONS

| | |
|-------------------------------------|-------------------------------------|
| Capacity: | 4000 kg |
| Maximum outreach: | 13,7 x 19,8 m including options |
| Maximum lifting height: | 16,3 og 22 m including options |
| Dimensions: | L: 3,93 m x B: 0,8 m x H: 1,97 m |
| Dimensions incl. winch and fly-jib: | L: 4,15 m x B: 0,8 m x H: 2,07 m |
| Own weight: | 3260 kg – and incl. options 4700 kg |
| Ground pressure: | 0,79 kg/cm ² |

EQUIPMENT

| | |
|-----------------|-------------|
| Electric motor: | 400 V |
| Fly jib length: | 5 m |
| Winch wire: | 50 m |
| Tracks: | Non-marking |

Can be used with MultiTool.

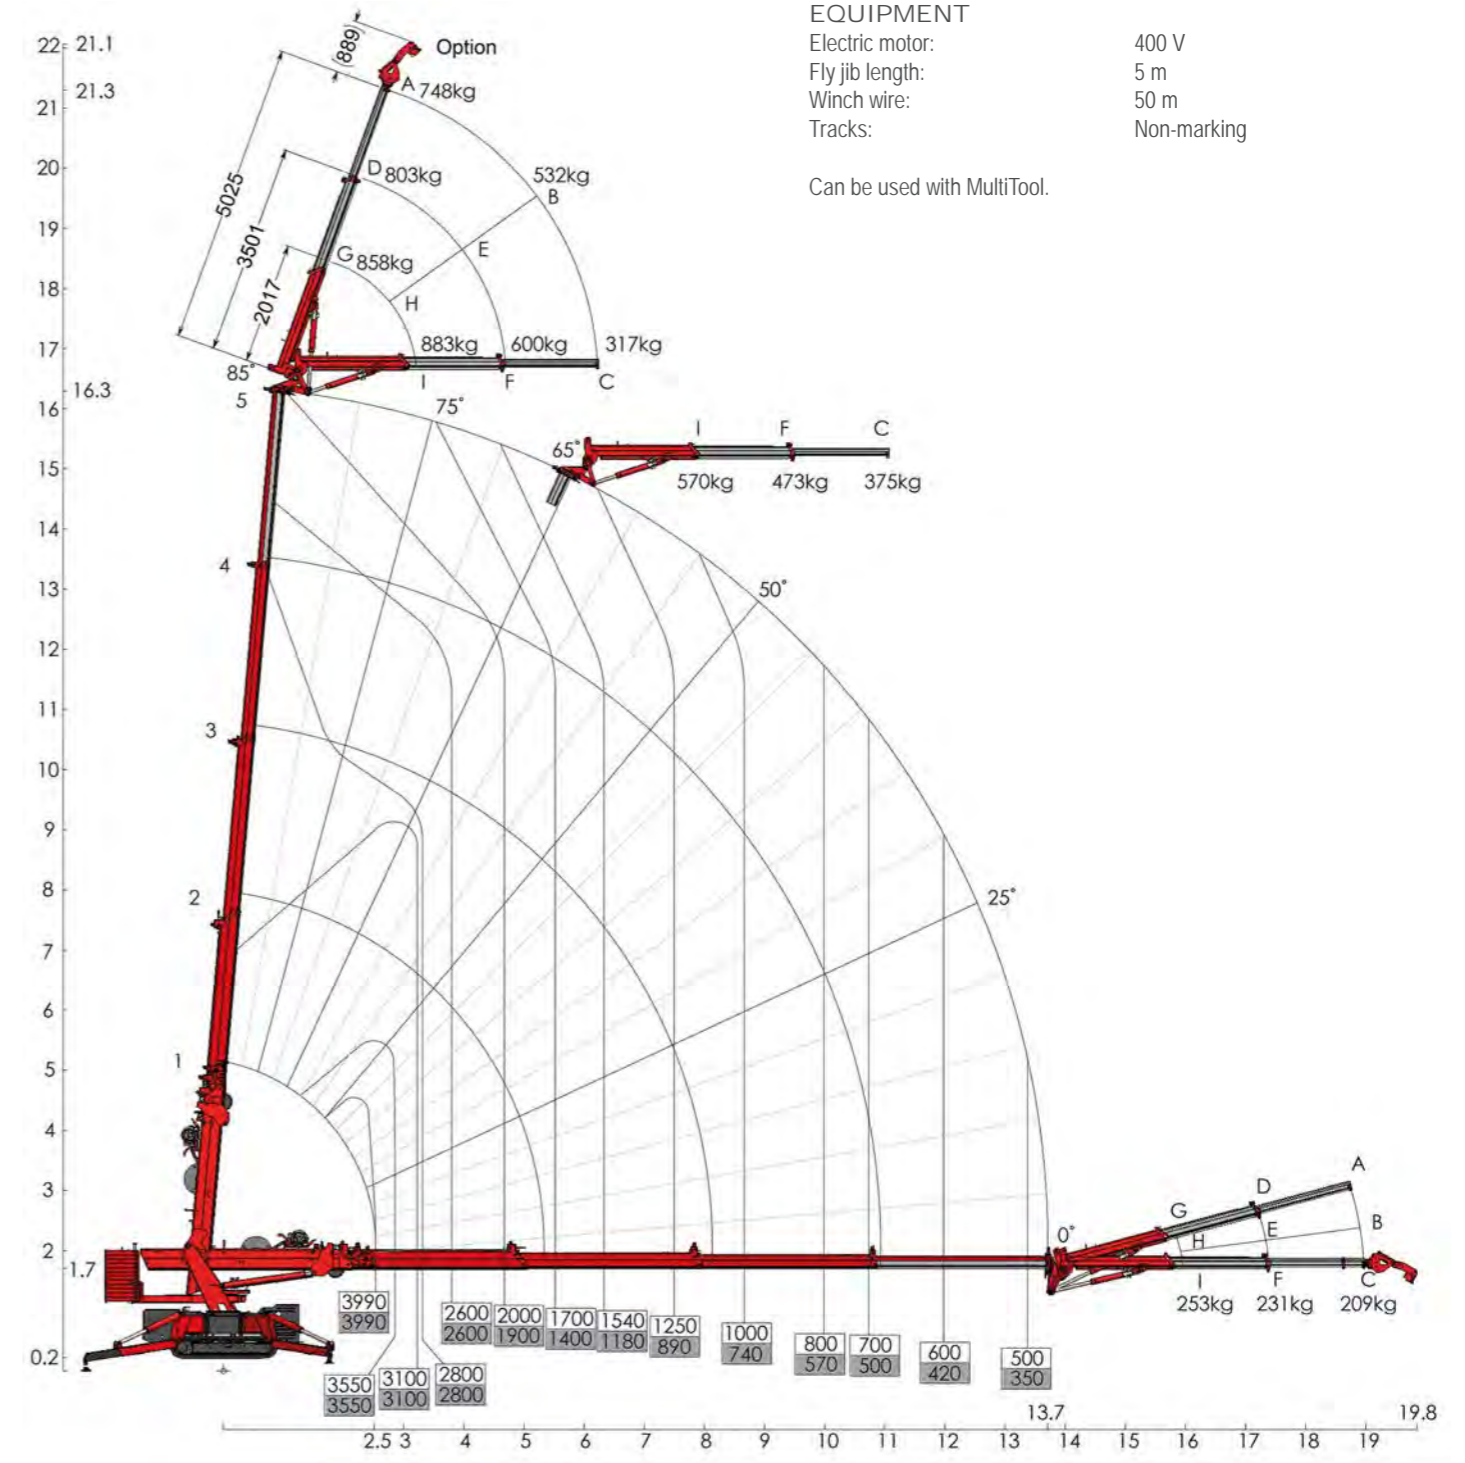

SuperCrane™

Multifunctional, robust and compact cranes



Full lithium driven pick & carry crane C30e compact crane

The Hoeflon C30e is a "State of the art" crane with easy operation and endless possibilities due to its very intelligent software. The C30e has endless rotation, stepless outrigger positioning and various outriggers.


SPECIFICATIONS

| | |
|-------------------------|-------------------------------------|
| Capacity: | 9000 kg |
| Maximum outreach: | 12,2 m with fly-jib 20 m |
| Maximum lifting height: | 14,5 m with fly-jib 22 m |
| Transport dimensions: | 3,85 m x 1,2 m x 2 m |
| Ovn weight: | 5600 kg – and incl. options 8700 kg |
| Engine: | Electric, lithium battery |
| Inclination range: | 20° |
| Ground pressure: | 0,79 kg/cm ² |

EQUIPMENT

| | |
|-----------------|-------------|
| Electric motor: | 230V, 400V |
| Fly-jib: | 7,5 m |
| Winch wire: | 40 m |
| Tracks: | Non-marking |

Can be used with MultiTool.

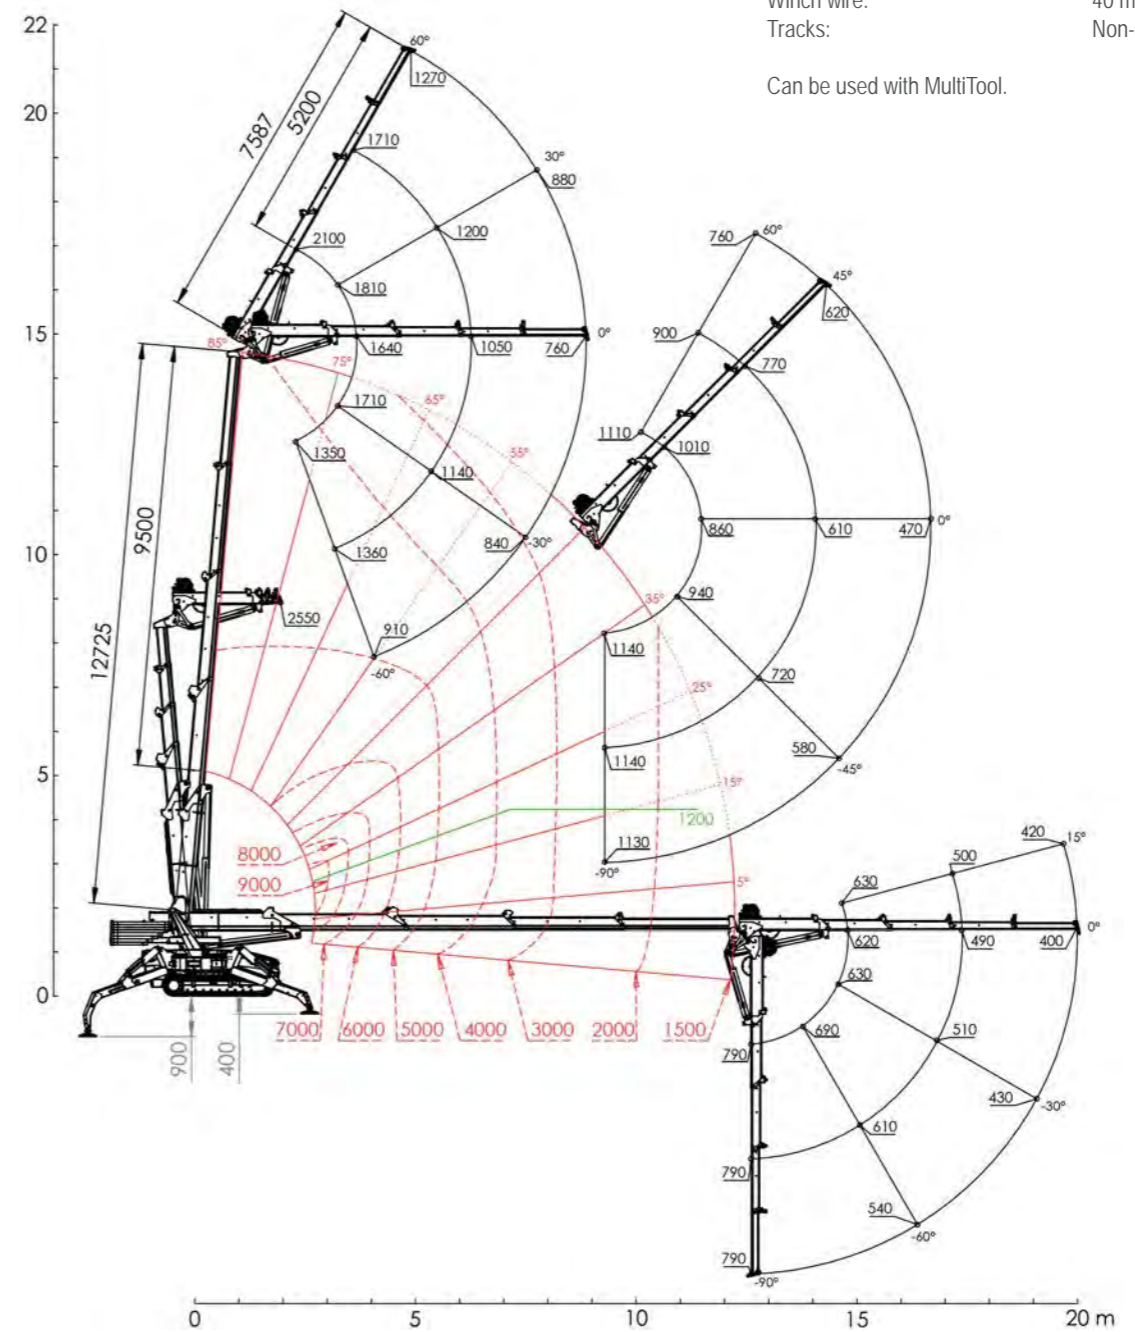

SuperCrane™ SC180

Designed to lift materials and tools up to 180 kg at a height of 60 metres.

The portable folding crane SuperCrane™ SC180 is an innovative and efficient solution for lifting heavy materials that do not fit into an elevator or staircase. The crane easily lifts materials that, due to their dimensions or weight, cannot be lifted in any other way than through the building's facade.

When lifting glass, any sudden impact can break the glass. Therefore, the portable folding crane SuperCrane™ SC180 is also produced in a special model specifically suitable for lifting glass.

SuperCrane™ SC180 Glass is operated with a cable remote control, and the crane model is the same as the SC180. The crane has the same lifting capacity of 180 kg and a lifting height of 60 m.



SuperCrane™ SC180 Glass is equipped with a frequency converter that acts as a total control capacity, both when starting, in soft descent and stopping. After holding the button for either of the two actions - up or down - you will notice that it takes 10 seconds before the motor operates at full capacity. This provides a 10 second reduced speed for the task itself.

Thanks to this variable frequency converter system, you cannot only raise windows but also perform an installation at very low speed levels - without the risk of pulling or banging, preventing the glass from breaking.

When the SC180 Glass model is used in daily work, you as a user can mount glass with millimetre precision.



Weight of trolley and motor 55 kg. The weight of the crane is 105 kg.

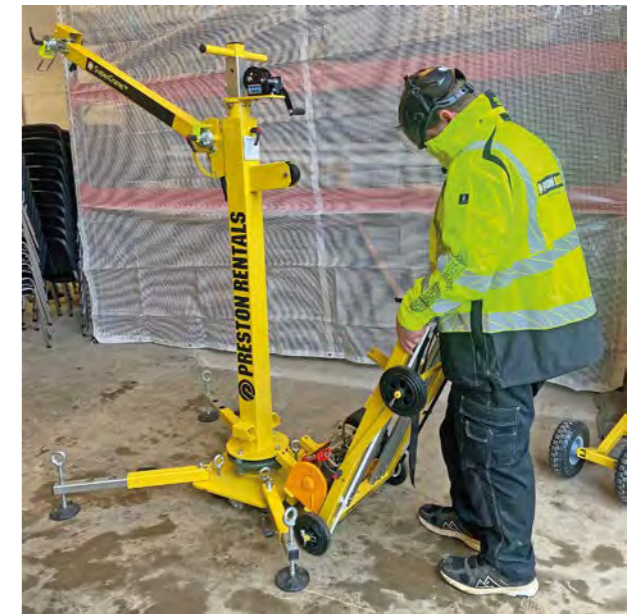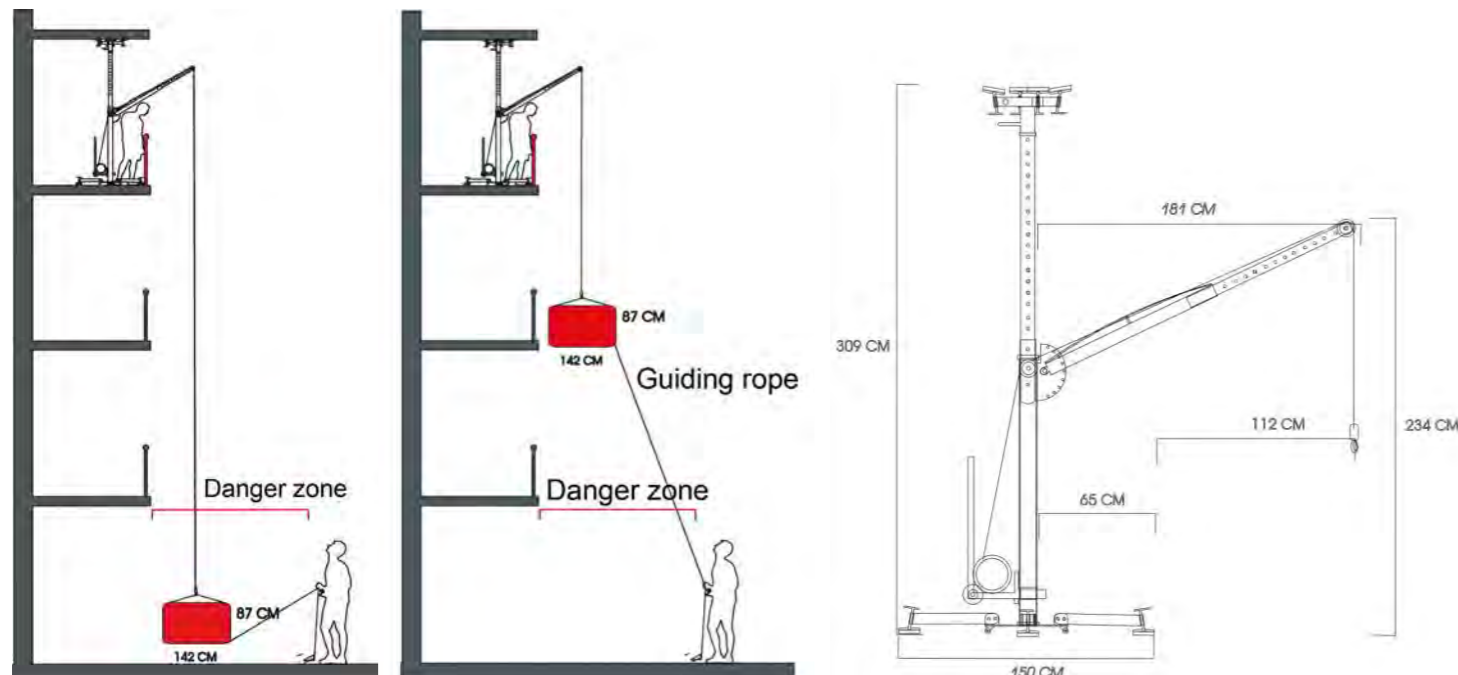

SuperCrane™ SC180





The SC180 crane is easily set up on balconies as a deck support (soldier). By being tensioned between the floor and ceiling, the ceiling serves as ballast, and the 180 kg can easily be lifted from street level to the floor in question.

If it is not possible to place the crane in a floor setup, it can stand freely with an associated ballast arrangement.

The ballast of the crane in this setup is 360 kg.

The crane is the ideal tool for installation work:

- Ideal for materials such as glass, railings, etc.
- Precision in installation
- Bump-free lifting
- Controlled elevation with remote control

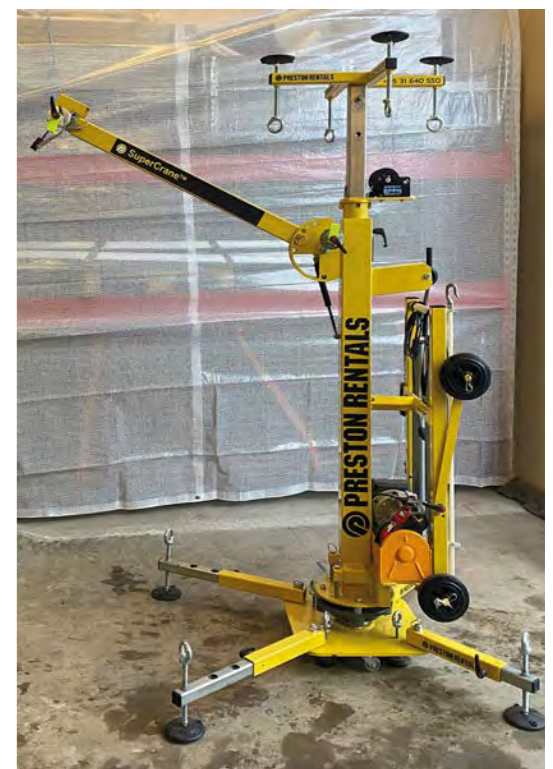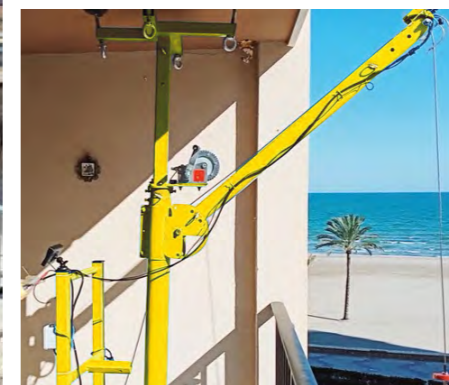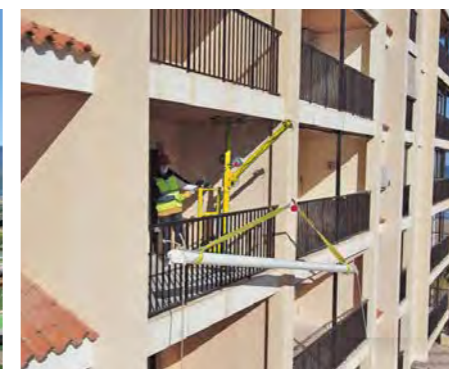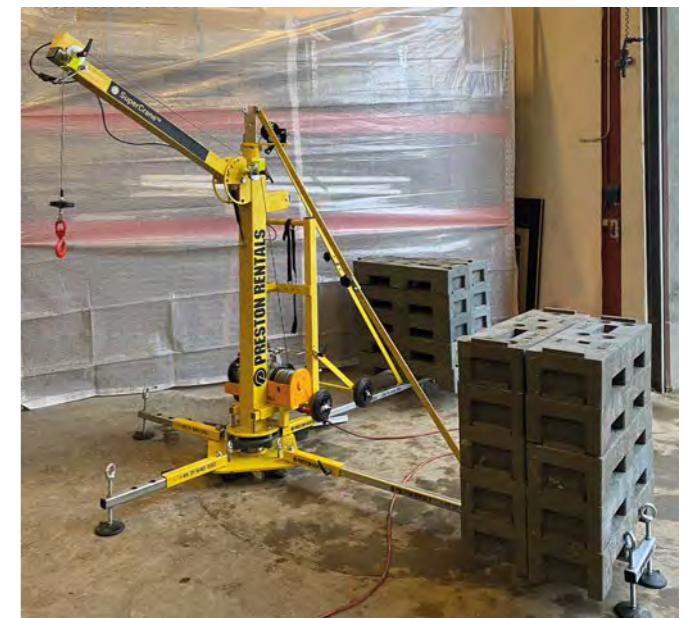

SuperCrane™ EK400

Designed to lift materials and tools up to 400 kg at a height of 100 metres.

New model SuperCrane™ EK400:

The new model SuperCrane™ EK400 is a revolution for lifting windows, awnings, pergola, glass, aluminium, furniture and construction materials.

Compact designed:

Thanks to its compact size it fits in any elevator. The battery-powered motorized wheels make it easy to transport and load into vehicles.

Great work capacity:

With a 3 HP motor it can lift up to 400 kg/881 lb. Maximum height capacity of 100 m./328 Ft.

Electronic security:

With single-phase voltages of 110v 60hz. Our new hoist is equipped with variable frequency drives with soft start-stop.

Improvements:

- Double brake and hydraulic piston.
- Support wheel.

Two cranes in one:

- Balcony anchor system.
- Counterweights.

Versatility:

Great ability to adapt to any situation.



SuperCrane™ EK400

The crane is easily set up on balconies as a deck support (soldier).

By being strung between floor and ceiling, the ceiling acts as ballast, making it possible to easily lift up to 400 kg from street level to the floor in question without difficulty.

If the crane cannot be placed in a floor setup, it can stand freely with an associated ballast arrangement.



The crane is the ideal tool for installation work:

- Ideal for materials such as glass, railings, etc.
- Accurate installation.
- Bump-free lifting.
- Controlled elevation with remote control.

Weight of trolley and motor 105 kg. The weight of the crane is 215 kg.



The future of construction logistics with the new patented SuperCrane™ system.

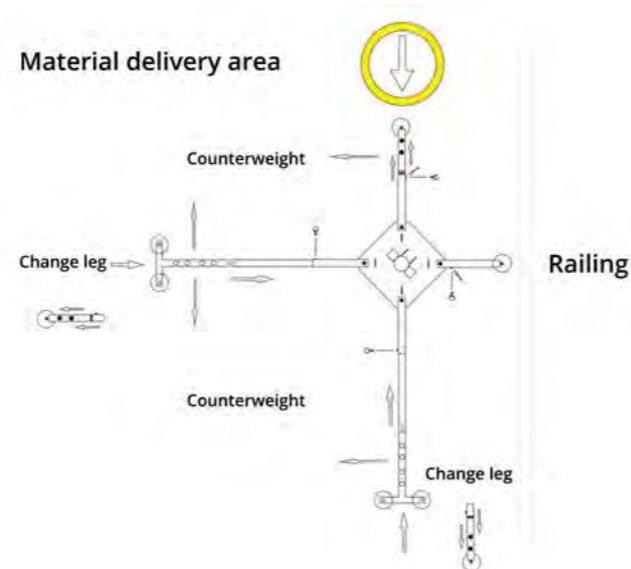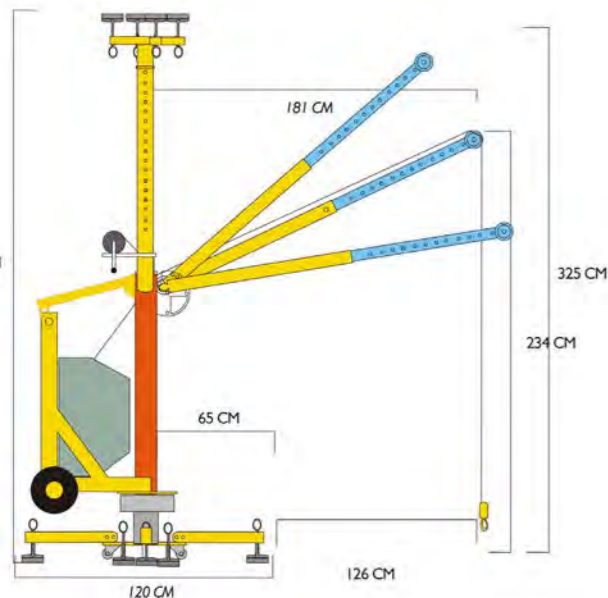

SuperGlassHandling™

At Preston Rentals, we offer nationwide hire of all types of glass suction cups and glass lifters with vacuum suction and lifting yoke, allowing you to carry out your glass suction and vacuum suction tasks safely and efficiently.

We can quickly adapt to your specific task. We are happy to combine the crane task, including both glass suction and transportation. Of course, we deliver on time and at competitive prices.

Vacuum yokes are also an efficient gripping equipment for tasks involving airtight items:

- Transport of glass
- Glass lifting and installation
- Lifting of sandwich panels
- Lifting of fibre concrete and balcony bases
- Other tasks involving glass suction and vacuum suction



Lifting and transport with vacuum suction

320 KG SPIDER SUCTION

This suction cup has 4 suction cups arranged in a square and has a lifting capacity of 320 kg. It can be supplied with a remote control.

The suction cup is particularly suitable for lifting windows with glazing bars in the middle. Additionally, extensions can be attached to the cups, allowing the suction cup to be moved away from the suction surface. This is an advantage when installing windows where the glass is set deep in the frame or in sliding doors where the window is offset.

The suction cup can also be fitted with cups for lifting sandwich panels. With extension arms, stability is increased when lifting larger items.



320 KG REACH SUCTION

The glass lifter/reach suction x 4 for crane hook can lift up to 320 kg. This vacuum suction has 4 pieces of 11" suction cups in a row with a very low net weight of only 44 kg.

The reach suction is the perfect vacuum suction for narrow windows. The vacuum suction can both rotate and tilt manually.

This suction cup has detachable suction cups for increased flexibility and installation of very small windows/items.



135 KG 2 SUCTION CUP

This suction cup has 2 suction cups and a lifting capacity of 135 kg. The suction cup is particularly suitable for lifting small pieces of glass and windows.



600 / 800 / 1000 KG HOEFLON SUCTION


The Hoeflon Vacuum Suction is a multifunctional glass lifter of premium quality, with outstanding fit and finish at a highly competitive price.

Unique features:

- Compact base unit for glass with small dimensions
- A spider-shaped design with large spread providing greater ease of installation, speed, and safety with large glass
- Lightweight design

The standard version includes:

- Remote control
- Transport trolley
- Long lifting arm
- Short lifting arm
- Replaceable battery system including an extra battery
- Protective covers for suction cups

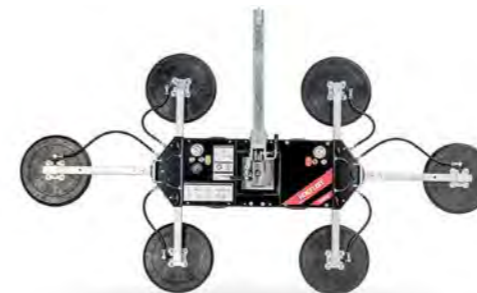

VIAVAC

Lifting - rotating - tilting

With VIAVAC vacuum lifters, you can install all types of panels.

Benefits:

- Speeds up installation
- Reduces labour costs
- Improves working conditions
- Prevents damage
- Complies with all safety standards

You can rent or buy VIAVAC from us


No panel tasks are the same. Contact us, and we'll assist you with suggestions for your specific task.



CladBoy CBC4
- the practical unit for wall panels.



CladBoy CB5
- the practical unit for wall panels. Also suitable for sandwich roof panels/roof panels. Can be configured.

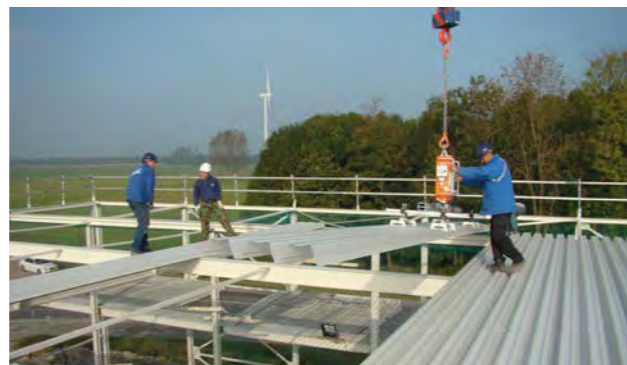

RotaBoy Kompakt
- easily rotates large roof panels. Up to 350 kg. Please contact us if the weight exceeds 350 kg.



Kompakt 4 Flex
- with adjustable and special made suction cups for the installation of a broad range of profiled panels.



VIAVAC

Lifting, rotating and tilting of glass

With the VIAVAC glass lifters you can install all types of glass.


You can rent or buy VIAVAC from us

Vacuum glass lifters are ideal tools for a quick, safe and damage free placement of elements.

VIAVAC – the perfect lifting tool for any glass installation.

Advantages:


- Speeds up installation
- Reduces labour costs
- Improves working conditions
- Prevents damages
- Complies with all safety standards.

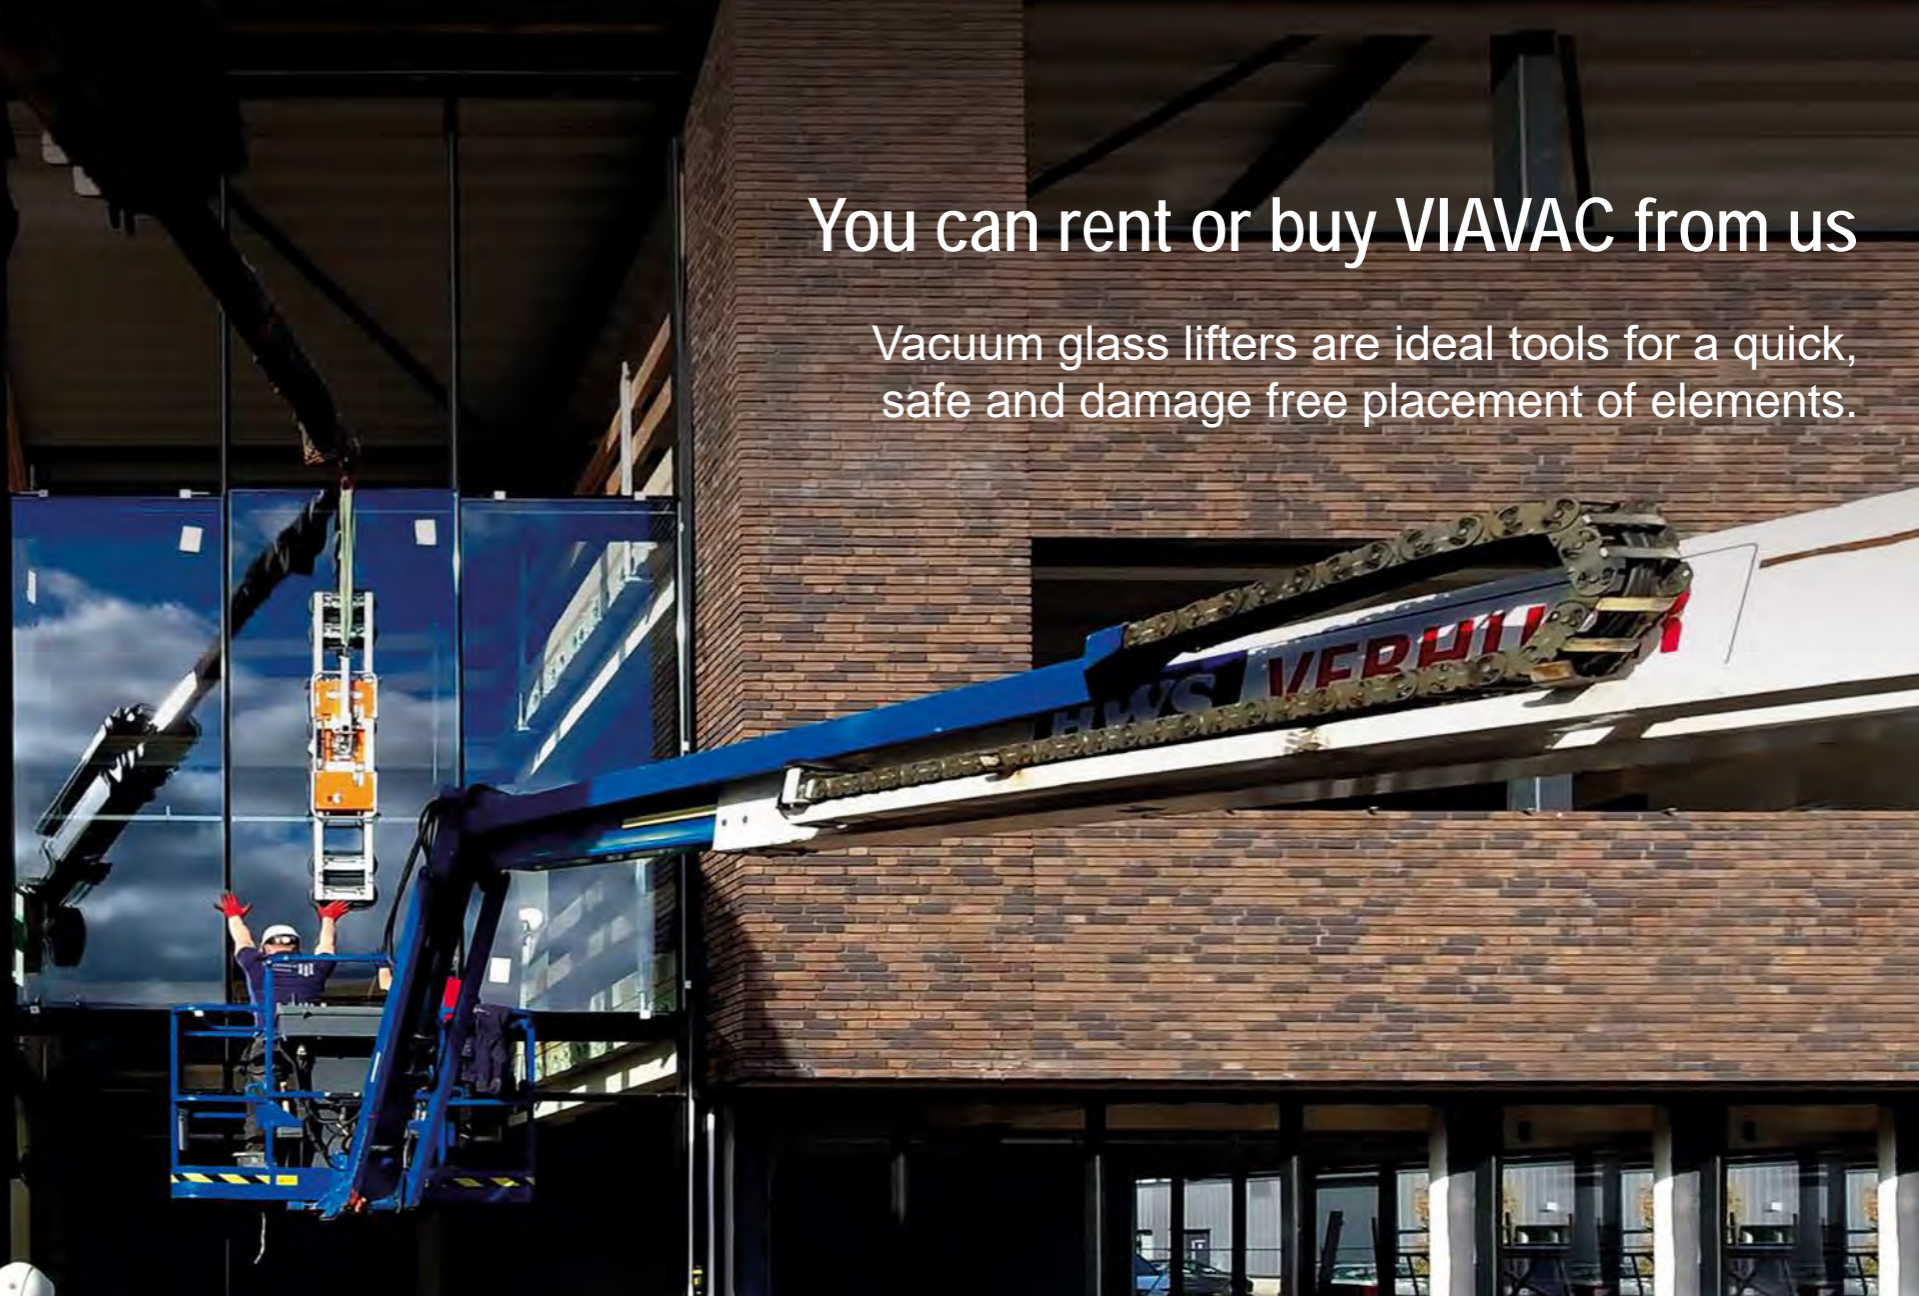



GBH
- For large and heavy glass elements up to 1,800 kg.



GBX
- For installation of small glass elements up to 800 kg.

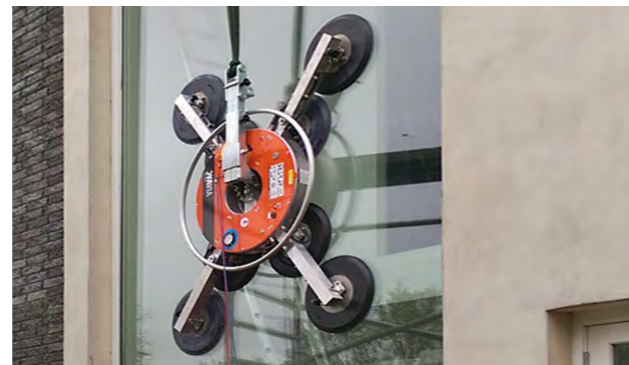

GBL
- small machine for large glass elements. GBL can solve almost any task up to 500 kg.

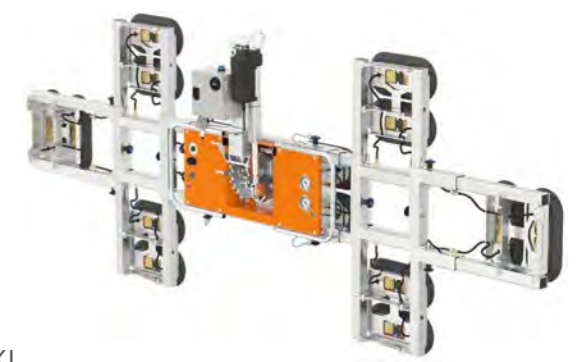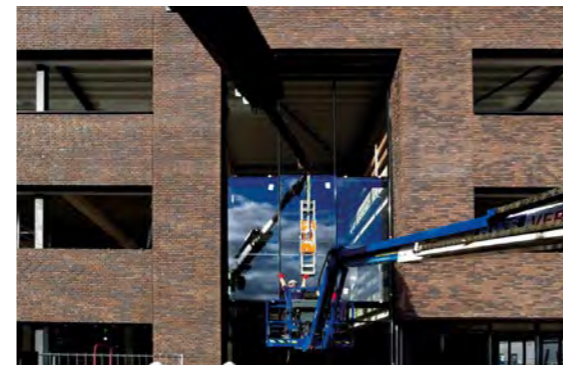

GBXL
- all-round machine for installation of most glass elements up to 1,000 kg.



SuperGrab™ BX1000

Proven and robust technology that minimises heavy lifting and optimises the workflow in the installation of I-beams, steel beams, and for example circular objects such as downpipes, drainpipes etc.

Heavy and strenuous work made easy
No more pulleys, hoists, and chains when lifting beams and pipes in your installation work. The SuperGrab™ BX1000 can be easily mounted on one of our SuperCrane™ C6 or C10.

What can SuperGrab™ BX1000 do?
The SuperGrab™ BX1000 has a capacity of 1000 kg but works in conjunction with the crane's lifting capacity and operating diagram. The SuperGrab™ BX1000 can lift items up to 1000 kg - with adjustable manoeuvring, it lifts and rotates items both vertically and horizontally. This optimises the time processes during installation and saves valuable crane time.

Easy and safe operation
With the crane's intuitive remote control, items are lifted easily and securely placed in the right position.



SuperGrab™ BX1000 for easy positioning

The SuperGrab™ BX1000 industrial manipulator for positioning pipes and beams can perform three hydraulic functions: gripping, rotating, and tilting.

The SuperGrab™ BX1000 is attached to the crane and controlled via the crane's remote control. It is indispensable in the construction industry, both for new construction and renovation.

The SuperGrab™ BX1000 enables the unloading and stacking of heavy poles, beams, pipes, as well as their precise vertical and horizontal positioning during installation.


- Grip, rotate, and tilt the load
- Compatible with multiple machines
- Precision work vertically and horizontally
- Eliminates heavy lifting
- Ideal for pipe installation and beam mounting



SPECIFICATIONS

| | |
|----------------------------|--------------|
| Maximum load capacity: | 1000 kg |
| Load size: | 100 – 300 mm |
| Jaw distance: | 1445 mm |
| Number of jaws: | 2 pieces |
| Weight: | app. 320 kg |
| Built-in hydraulic rotator | |
| Locking force 23kN | |
| Non-return valve: | Yes |

Electric change valve for switching to three circuits
(functions for cranes with two hydraulic valves available).

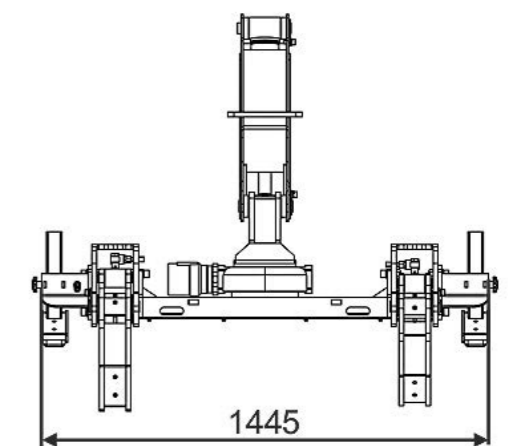

For more information, please contact us at phone: +45 31 640 550 or e-mail: mail@prestonrentals.dk

MultiTool

Mount your crane for all types of tasks




MultiTool offers a combination of functions as an extension to the Hoeflon compact cranes. With MultiTool, most types of beams, pipes, sheets of glass and pallets can be easily put in the right place. If your task requires a completely special and unique fittings, this can be designed.

MultiTool has been developed in close cooperation with users from the field. This results in products that are in a class of their own. The many functions and details provide the user with many new possibilities and conveniences in daily use.

Unique features:

- Various attachments
- Compatible with the Hoeflon C6, C10, and C30e cranes
- Outstanding rotational axes

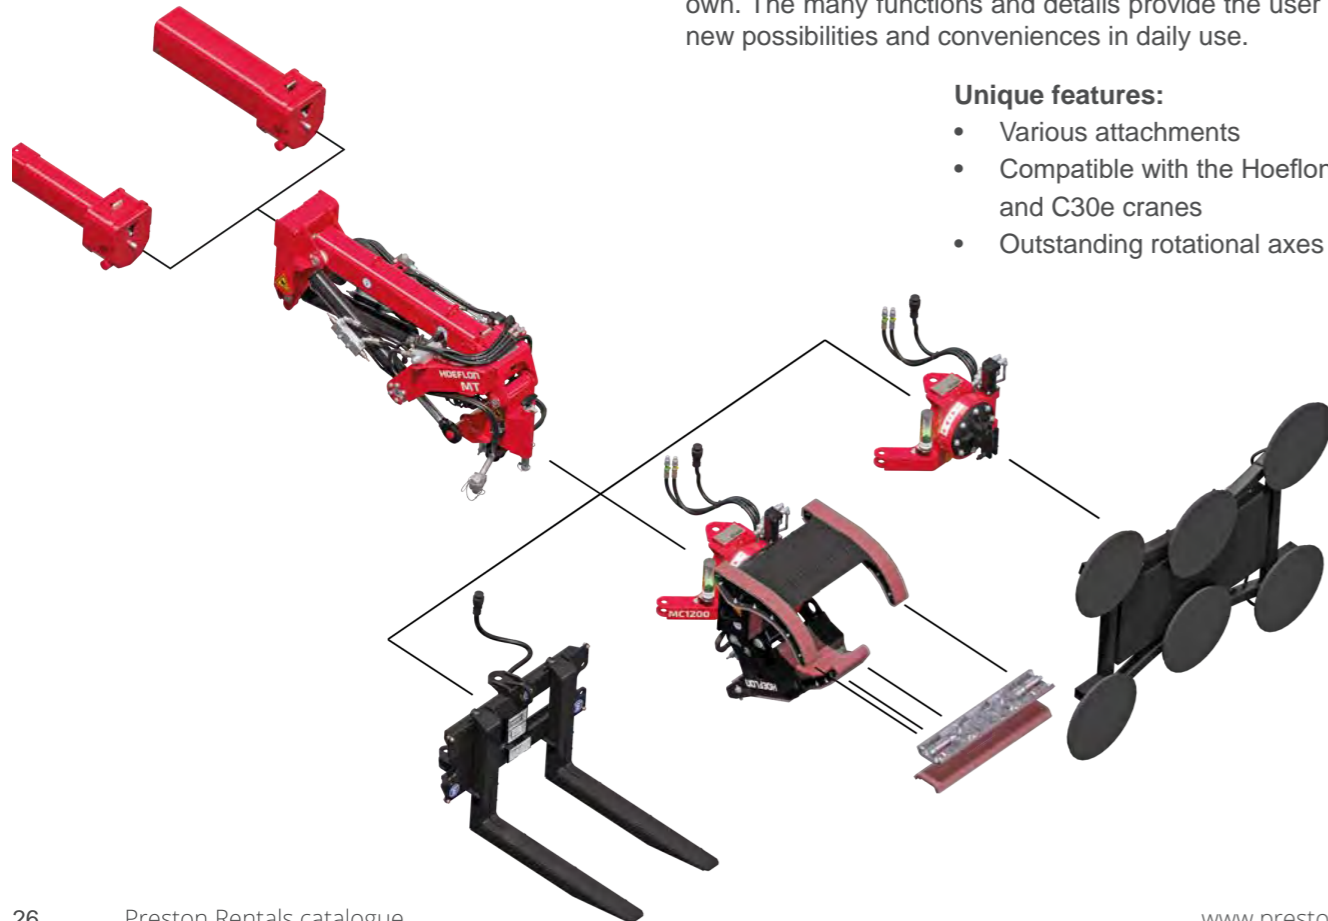

MULTICLAW

Multiclaw with clamping jaws for clamping and moving beams, etc. These clamping jaws can lift pipes with a diameter of up to 500 mm.

The beam clamp consists of a narrow jaw with a single clamping element and a wide jaw with a double clamping element. Objects of various shapes can be clamped in these jaws.

Removable clamping plates increase the clamping surface and allow clamping an object parallel to the jaws. Without the clamping plates, it is also possible to clamp a plate or a beam on the outside of the clamping jaw.

SPECIFICATIONS:

| | |
|--|---------|
| Weight of Multiclaw including clamping jaws: | 340 kg |
| Weight of clamping jaws: | 188 kg |
| Pipe diameter, beam clamp: | 500 mm |
| Maximum lifting capacity of beam clamp: | 1250 kg |
| Lifting capacity, eye: | 2000 kg |



MULTIVAC

The glass suction lifter is a vacuum lifter for positioning and moving medium to large, flat, and non-porous sheets of glass.

Glass suction lifters are attached to the MultiTool via an adapter.

This unit has the same freedom of movement as the beam clamp (Multiclaw).

SPECIFICATIONS:

| | |
|---|-------------------------|
| Weight, MultiTool including glass suction lifter: | 198kg |
| Machine weight: | 85 - 110 kg |
| Maximum lifting capacity: | 1000 kg |
| Lifting capacity, eye: | 2000 kg |
| Type of glass suction lifters: | C600, S600, S800, S1000 |



MULTIFORKS

The MultiForks pallet fork frame can be mounted on the MultiTool for lifting and moving pallets.

The long reach of the compact crane allows for placing pallets in high and hard-to-reach places.

MultiForks can only be used with the C30e.

SPECIFICATIONS:

| | |
|---|---------|
| Weight of pallet fork frame including tines: | 64 kg |
| Weight, MultiForks including pallet fork frame: | 216 kg |
| Maximum lifting capacity: | 2000 kg |
| | 800 mm |



Crane Accessories

Hoeflon Jib transporter

Unique features:

- Multifunctional
- Suitable for C4, C6, C10, and C30
- Easy to disassemble
- Lightweight - 45 kg
- Compact storage

Net weight: 45 kg
Dimensions: 1115 x 770 x 478 mm



Hoeflon lifting beam

The all-rounder beam with unique features for compact cranes:

- Low weight
- Compact dimensions
- Flexible adjustability
- High capacity

Net weight: 45 kg
Capacity: 1,2 - 6 ton
Dimensions: 1250 x 169 x 274 mm



Plasterboard clamp

The plasterboard clamp is designed for lifting as well as vertical transport of wood, chipboards, and plastic sheets.

The clamp is attached to the board using a handheld handle. The jaw, which has a protective lining, grips securely when the lifting begins.

Capacity: 400 - 750 kg.



Beam Grab

The Beam Grab has a load capacity of 1,000 - 10,000 kg.

- Robust steel construction
- Compact size with low weight
- Low built-in height
- Super-fast adjustment on any flange
- It is easy to use and can be used for mounting on beams for the installation of hoists, etc., and for lifting beams.
- Several types are available, e.g. with shackle in suspension and other hanging options.



Kerbstone Clamp

The Kerbstone Clamp can be installed on cranes and mini excavators. It can be used for regular/square stones or foundation blocks.

Maximum lifting capacity: 200 kg
Capacity: 100 - 300 mm
Width of rubber pads: 240 mm
Own weight: 12 kg
LxHxB: 60 x 60 x 24 cm



Chains, Straps, Shackles

At Preston Rentals, we offer various types of lifting equipment for your task. This could include chains with shortening hooks or flat straps. Through close dialogue, we determine the right assortment of lifting gear for your task.



The following equipment is always included for free when hiring our cranes:



2 pcs. of straps WLL 1 ton, 1 mtr. (Violet)

2 pcs. of straps WLL 1 ton, 2 mtr. (Violet)



4 pcs. of H-Shackle WLL 2,0 ton, 1/2"



Intermediate piece for hook with 4 wire cutting



4 tons crane hook with swivel (Brand: Gunnebo)



H-Shackle with lock WLL: 3.25 tons



Wire steering



Wire wheel for cutting wire (2 pcs.)




Insertion piece to be used in main arm

Do you need crane work with a compact crane?

We offer crane services performed by experts and specialists for lifting your materials or installation tasks.

We specialise in hoisting all types of construction materials and can assist you with everything from small tasks to window installation.

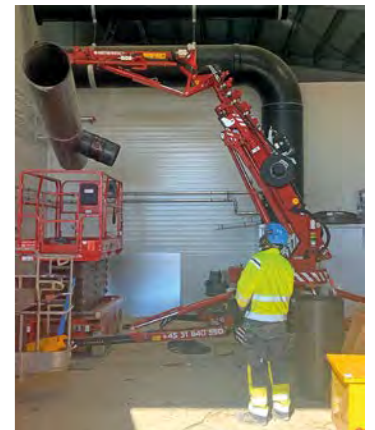

SuperElevate™

Transport Carrier Hoeflon TC1 - compact, strong and robust


The Hoeflon TC1 transporter is the solution for the horizontal transport of long, heavy construction materials and equipment on a project site. It is a battery-powered transport platform with endless possibilities.

The TC1 platform is equipped with a swivel crane with a rotating platform that can rotate infinitely. This provides significant flexibility in transporting beams, stairs, etc. The TC1 transporter has a low centre of gravity and precise manoeuvrability. It easily moves around different ground heights and uneven terrain, even when loaded.

TC1 can also navigate very steep inclines. It is an ideal machine in combination with Hoeflon cranes.

It is designed with various stick holes, extension arms, and lashing, ensuring that the cargo remains stable during transport.

This also makes it easier to construct custom-designed racks, glass trestles, and the like. Our transporter, Hoeflon TC1, can pass through any door. No matter where your goods are, our little assistant transporter will get there.

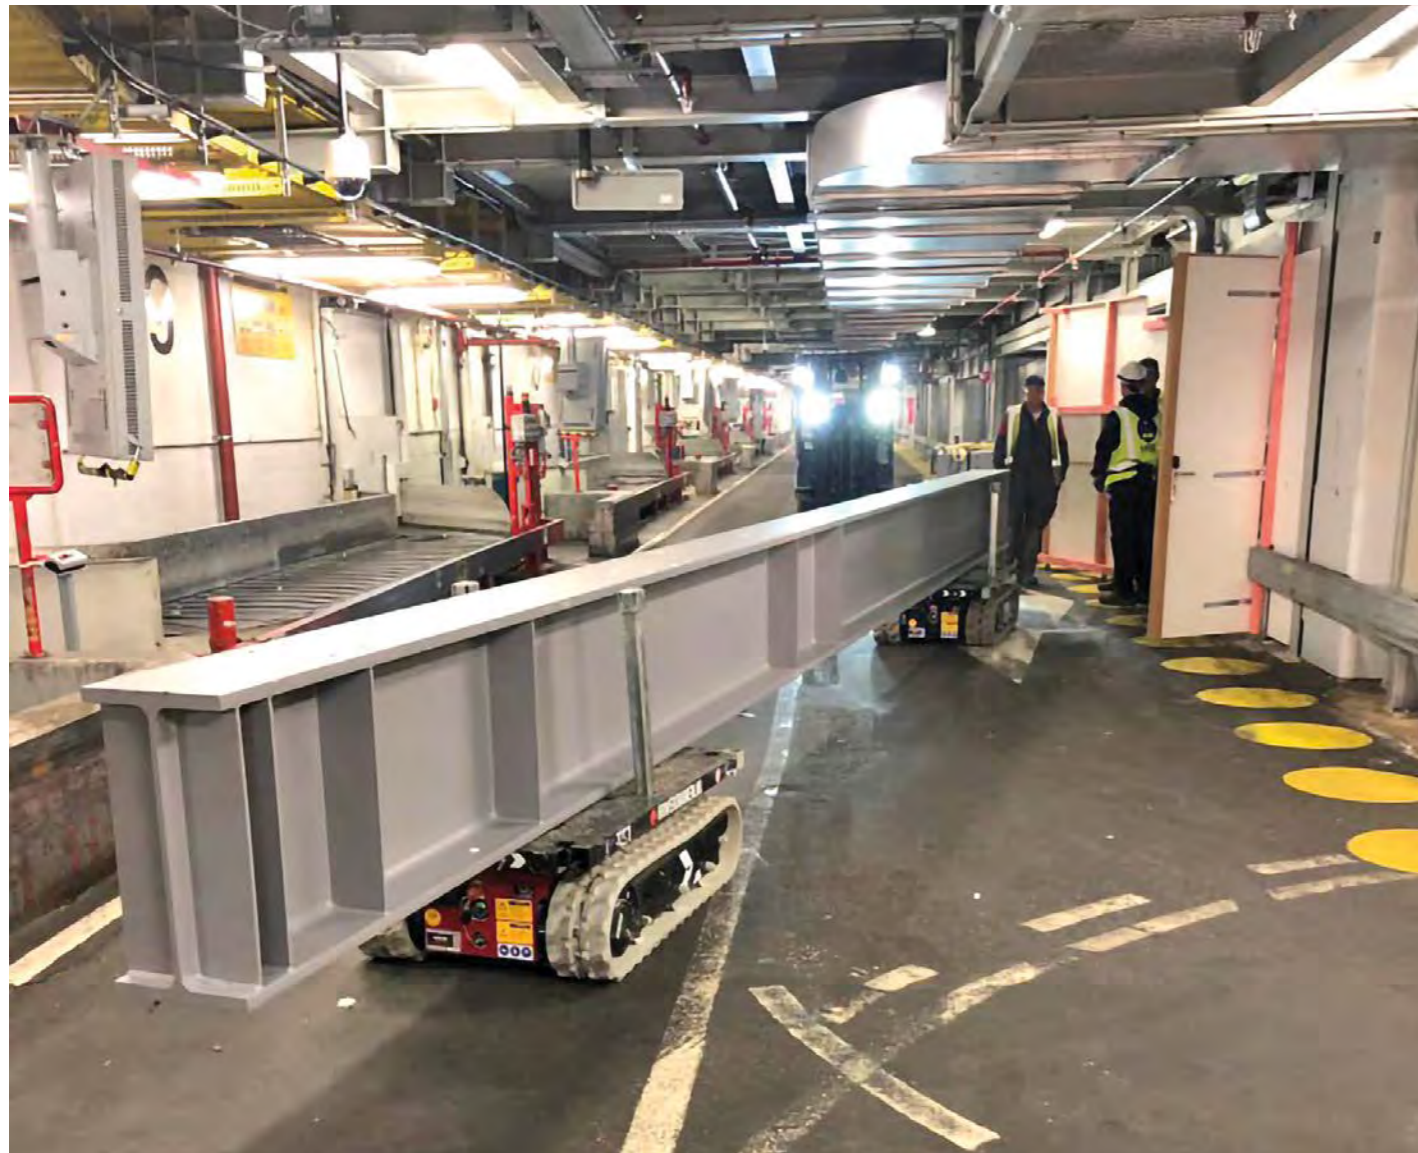

SPECIFICATIONS



| | |
|-------------------------|--|
| Capacity: | 1000 kg |
| Net weight: | 325 kg (incl. TC1 platform 370 kg) |
| Dimensions (lxbxh): | 1300 x 700 x 335 mm (height incl. TC1 platform 420 mm) |
| Power: | Electric |
| Power supply: | Battery pack |
| Charger: | 230V - 50Hz |
| Charging time: | 13 hours |
| Ground pressure: | 0,15 kg/cm ² |
| Maximum speed: | 2,2 km/t |
| Speed regulator: | Proportional drive |
| Maximum angle of climb: | 25° |
| Maximum side slope: | 20° |
| Loading platform (lxb): | 1340 x 730 mm |
| Type of platform: | Rotatable |



Available in various sizes - please contact us to learn more.

TC1 in brief:

- Compact, strong, and robust
- Highly precise manoeuvrability
- Easy attachment of load items
- The platform is movable/rotatable
- Silent due to the electric drive

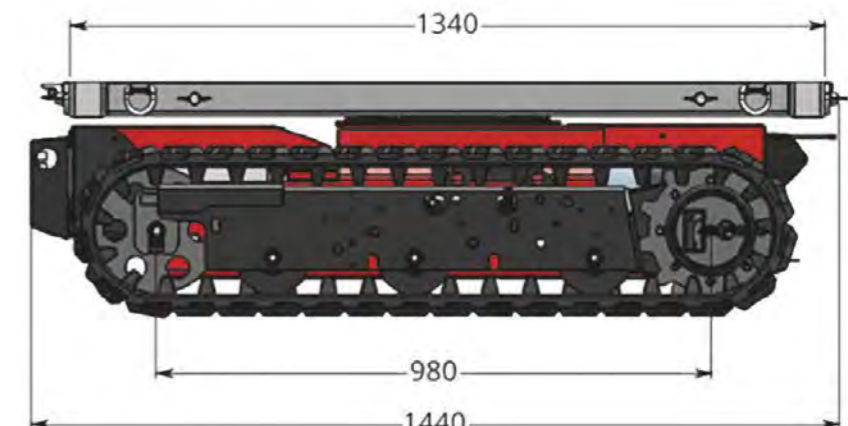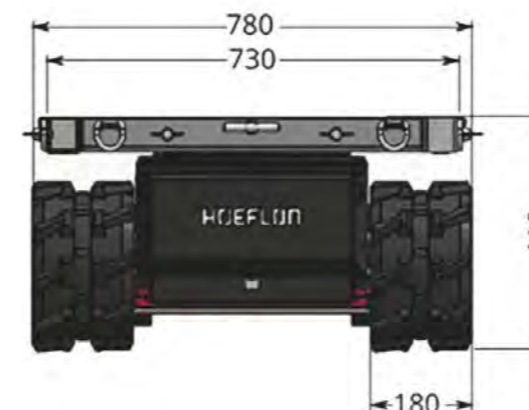

SuperElevate™

Transport Carrier TC1e Gen2 - Flexible and versatile

Hoeflon TC1e Gen2 transport carrier is available with multiple tools, including a lifting scissor and platform, with or without a turntable..

Platform

The TC1e with platform contains all the functionalities of the base. The platform weighs a total of 370 kg and has a capacity of 1000 kg. With a total height of only 420 mm it is designed compact and efficient.

Turntable

The turntable offers all basic functionalities and has a total weight of 400 kg. The capacity is 1000 kg. The turning range is endless, with an optional rotation limitation of 45 degrees. The height of the turntable is 430 mm. A platform or a lifting scissor can be placed on the turntable.



Lifting shears

The lifting scissor offers all basic functionalities. The lifting height is 300 mm, with the total height varying between 440 mm and 740 mm. The total weight is between 430 kg and 465 kg.



TC1e Gen2 in brief:

- Flexible and versatile transport carrier
- Fits through all doorways
- Low center of gravity and precise maneuverability
- Can drive with load through curves and on steep inclines
- Ideal in conjunction with crane

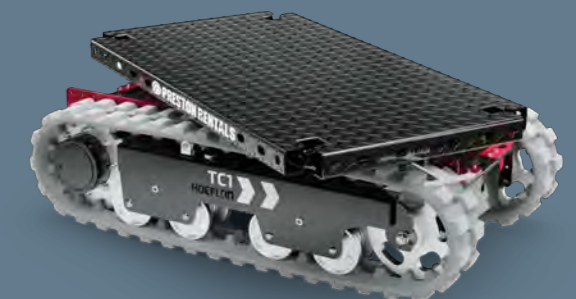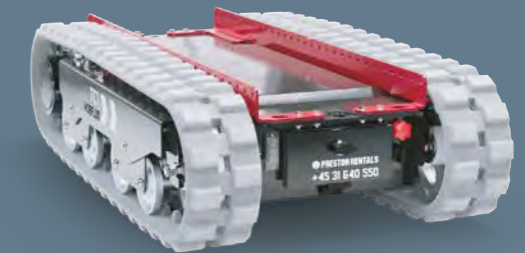

SPECIFICATIONS

| | |
|------------------------------------|---------------------|
| Capacity: | 1000 kg |
| Net weight: | 325kg |
| Dimensions (lwxhxh): | 1300 x 700 x 335 mm |
| Power: | Electric |
| Power supply: | Battery pack |
| Charger: | 230V - 50Hz |
| Charging time: | 4 hours |
| Maximum speed: | 6 km/h |
| Max. slope angle unloaded forward: | 45° |
| Max slope angle unloaded sideways: | 40° |
| Loading platform (lxw): | 1340 x 730 mm |
| Platform type: | Rotating |

TC1 turntable

| | |
|---|---------|
| Total weight: | 400 kg |
| Rotation range: | endless |
| Rotation lock: | 45° |
| Capacity: | 1000 kg |
| Height: | 430 mm |
| Turntable possible with lifting shears and platform | |

TC1 lifting shears

| | |
|-----------------|--------------|
| Lifting height: | 300 mm |
| Height: | 440 - 740 mm |
| Total weight: | 430 - 465 kg |

Ganterud

Efficient, reliable, and innovative lifting systems

Available in models:

- Ganterud L3
- Ganterud L5
- Ganterud L20-3




Ganterud is a proven and robust technology in a new design. Radio-controlled precision levelling reduces installation time and increases safety.

We hire and deliver efficient, reliable, and innovative Ganterud lifting systems to facilitate material handling and improve profitability, primarily within the building and construction sector.

Lifting, levelling, and turning materials on the construction site can be a time-consuming and challenging task. The Ganterud's remote-controlled levelling hoists make this work much more efficient and safer. All types of items that require accuracy and precision are easily navigated into place, reducing costly crane time and waiting time.

We hire the Ganterud remote-controlled levelling hoists with a lifting capacity of up to 20 tons. All lifting beams have robust and well-proven technology, as well as reliable electric operation, ensuring they function in all weather conditions. The hoists are manoeuvred smoothly with user-friendly and classified remote controls.

We are happy to provide free advice and guidance so you can solve your task most effectively.

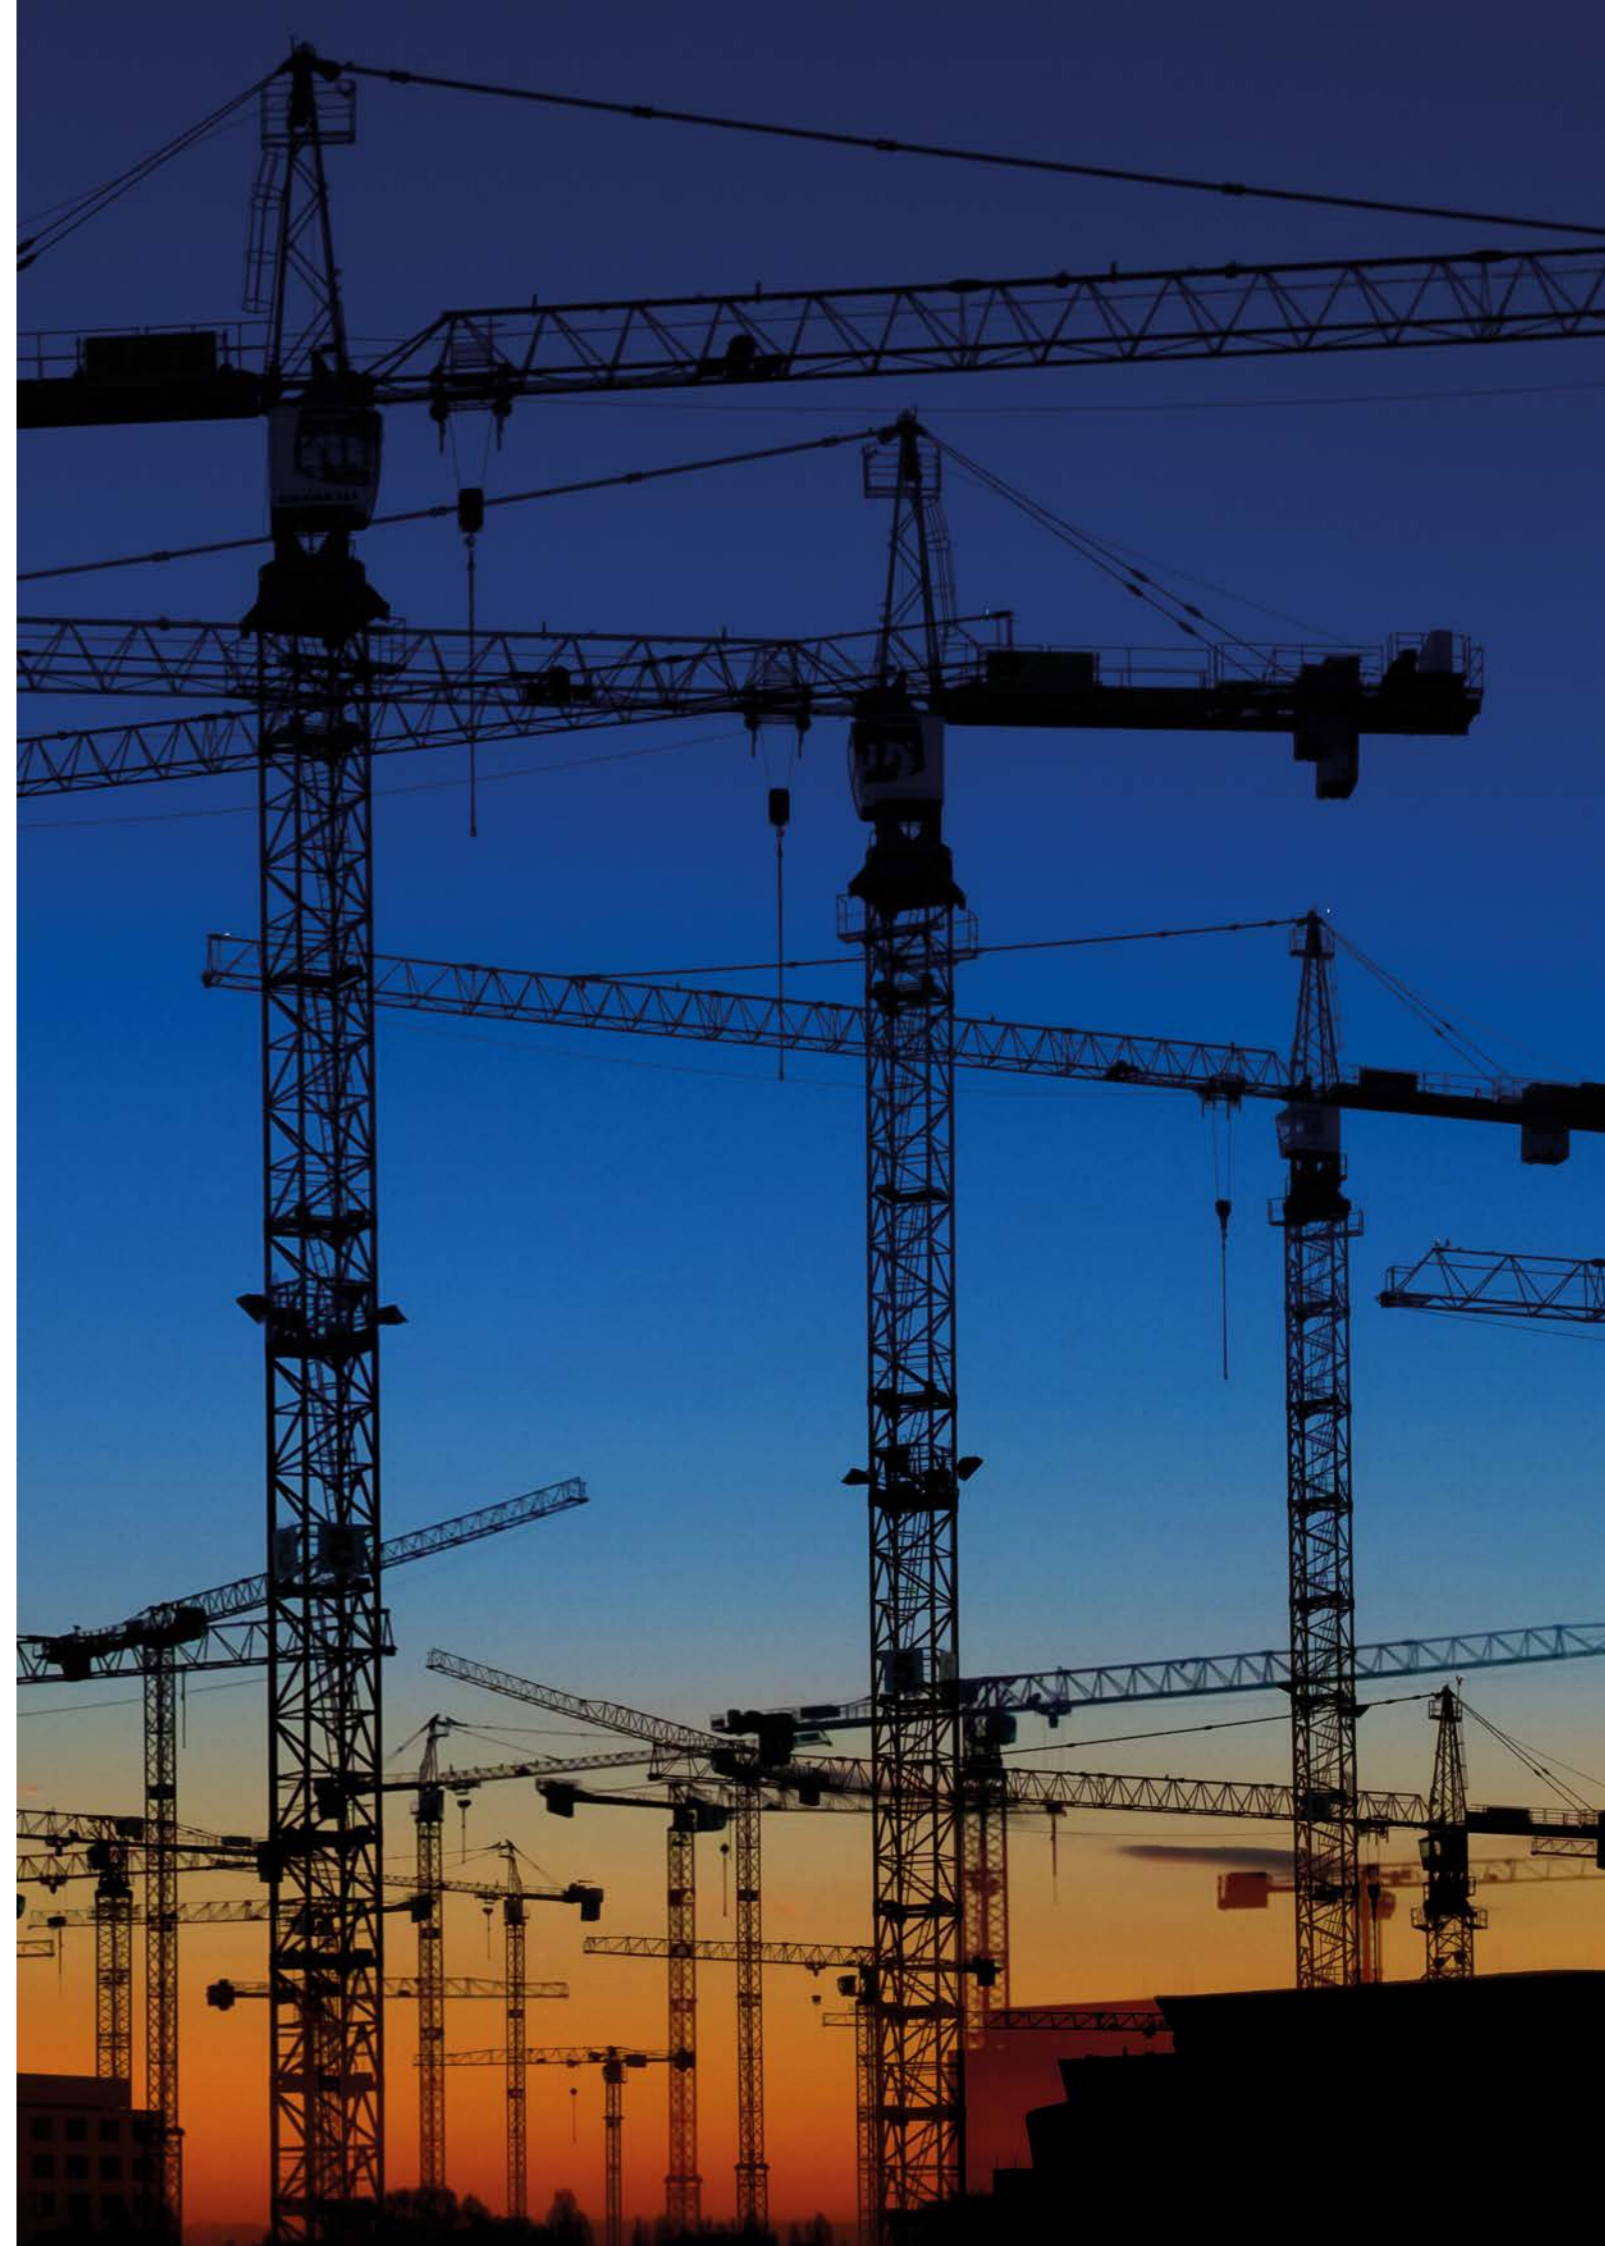

Ganterud L3

The Ganterud L3 remote-controlled precision levelling reduces your installation time and increases safety on the construction site.



The Ganterud L3 lifting yoke levels and handles building materials easily and safely with a simple press of a button. It ensures that you reduce costly crane time and waiting time. The lifting beam handles both light and heavy objects weighing up to 3 tons.

With its robust, proven technology and reliable electric operation, the Ganterud L3 can work in temperatures ranging from -20°C to +40°C. The lifting beam is easy to clean due to its robust housing and IP65-classified electrical system.

The Ganterud L3 requires minimal service - only cleaning and battery charging. The battery status is displayed. Under normal use, it is sufficient to charge the battery once a week. The Ganterud L3, with its user-friendly IP67-classified remote control, is easy to operate.

SPECIFICATIONS

| | |
|------------------------------|------------------------------------|
| Lifting capacity: | Max 3 tons |
| Levelling force: | Max 500 kg |
| Max levelling stroke length: | 3 m (1.5 m in both directions) |
| Levelling speeds: | 2 |
| Max chain angle: | 60° with a 3-ton load |
| Total chain length: | 3 m |
| Chain dimensions: | 30.5 x 10 mm |
| Weight: | 126 kg (Including chain and hooks) |
| Height: | 638 mm |
| Width: | 503 mm |
| Depth: | 495 mm |



Control system

| | |
|--------------------------------------|---------------------|
| Radio range: | 100 m line of sight |
| Electric motor voltage: | 24 VDC |
| Power consumption in hibernate mode: | 50 mA |
| Max continuous power consumption: | 24 A |
| Peak power consumption: | 30 A |

Certification: CE-marked product

Environmental Requirements

| | |
|------------------------|------------------------|
| Operating temperature: | -20°C – +40°C |
| Storage temperature: | -20°C – +45°C |
| Relative humidity, RH: | 0 - 90% during storage |

Optional Accessories

- Protective cover
- Chain kits in other lengths
- Additional batteries
- Transport packaging



Ganterud L5 (PRO)

The Ganterud L5 is a lifting yoke that, by utilising both new and proven technology, levels and handles loads efficiently and safely with high precision.



The Ganterud L5 lifting yoke can handle both light and heavy objects up to 5 tons. It maximises efficiency, reduces assembly time, and increases safety with precise and comprehensive levelling and handling of various types of objects. The Ganterud L5 has a reversible stroke length of up to 1.5 metres per hook in the standard version.

With a press of a button, the Ganterud L5 levels and handles its objects easily and safely, reducing costly crane time and wait time. A robust and proven technology, along with a secure electrical operation enable the lifting yoke to operate in all weather conditions from -20 to +40 degrees Celsius in demanding environments.

The robust, durable, and reliable housing, plus the IP65-classified electrical system, makes the lifting yoke easy to clean. In addition to cleaning, battery charging is the only thing to consider. The battery status is indicated on the yoke, and with normal use, one charge per week is sufficient.

The Ganterud L5 is used as a snatch block. With a user-friendly and IP67-classified remote control, the Ganterud L5 is manoeuvred smoothly. The chain wheel is disengaged with the remote control for free-running chain with the same function as a snatch block. A longer chain package can be ordered as an option.

SPECIFICATIONS

| | |
|------------------------------|--|
| Lifting capacity: | Max 5 tons |
| Levelling force: | Max 750 kg |
| Max levelling stroke length: | 3 m (1.5 m in both directions) in the standard version |
| Levelling speed: | 2 |
| Max. chain angle: | 60° at 5 tons load |
| Total chain length: | 3 m in the standard version |
| Chain dimensions: | 30.5 x 10 mm |
| Weight: | approximately 130 kg (Including chain and hooks) |
| Height: | 638 mm |
| Width: | 503 mm |
| Depth: | 495 mm |

Control System

| | |
|--------------------------------------|-------------------------|
| Radio range: | 100 m with a clear view |
| Motor voltage: | 24 VDC |
| Power consumption in hibernate mode: | 50 mA |
| Max continuous power consumption: | 24 A |
| Peak power consumption: | 30 A |

Certification: CE-marked product

Environmental requirements

| | |
|------------------------|------------------------|
| Operating temperature: | -20°C – +40°C |
| Storage temperature: | -20°C – +45°C |
| Relative humidity, RF: | 0 - 90% during storage |

Optional accessories

- Protective hood
- Chain kit in other lengths
- Additional batteries
- Transport packaging.



News - autumn 2025



Ganterud L10

Extreme levelling force in a compact format. Lifts heavier loads from horizontal to vertical position.

Perfect for heavy-duty industrial use, with a lifting capacity of max. 10 tonnes and a load imbalance capacity of max. 4 tonnes!



Ganterud L40

Ganterud L12 PRO

Proven and Robust Technology in a New Application.

Remote-controlled handling and precision leveling. Maximizes efficiency, reduces installation time, and enhances safety.

The L12 Pro is an advanced leveling device designed to handle both light and heavy loads – from 0 kg up to 12 tonnes – with high precision and safety. Capable of rotating heavy objects 90 degrees, the L12 Pro also functions as a free-running chain block, operated via remote control. Extended chain packages are available as an option.

The equipment offers a leveling stroke of up to 4 meters per hook, significantly increasing productivity by reducing crane and waiting times. Operation is intuitive – just the push of a button.

Engineered for demanding environments, the L12 Pro operates in temperatures ranging from -20 to +40 °C. Its robust design and IP65-rated electrical system make it easy to clean and highly reliable. The remote control is IP67-rated and user-friendly.

Maintenance is minimal – aside from cleaning, the unit only requires charging, typically once per week. Battery status is clearly displayed on the device. Leveling can be performed at two selectable speeds for increased precision.



SPECIFICATIONS

| | |
|-----------------------|--|
| Lifting capacity: | Max. 12 tonnes |
| Leveling force: | Max. 2.5 tonnes |
| Max. leveling stroke: | 4 m (2 m in each direction) |
| Leveling speeds: | 2 |
| Max. chain angle: | 60° at 12-tonne load |
| Total chain length: | 4 m in standard version |
| Chain dimension: | 48 x 16 mm |
| Weight: | approx. 295 kg (incl. chain and hooks) |
| Height: | 750 mm |
| Width: | 740 mm |
| Depth: | 595 mm |

Control System

| | |
|------------------------------------|---------------------|
| Radio range: | 100 m line-of-sight |
| Motor voltage: | 24 VDC |
| Standby power consumption: | 50 mA |
| Max. continuous power consumption: | 24 A |
| Peak power consumption: | 30 A |

Certification:

CE-marked product

Environmental Requirements

| | |
|-------------------------|----------------------|
| Operating temperature: | -20°C to +40°C |
| Storage temperature: | -20°C to +45°C |
| Relative humidity (RH): | 0–90% during storage |

Optional Accessories

- Protective cover
- Chain kit in custom lengths
- Extra batteries
- Transport packaging



For more information, please contact us at phone: +45 31 640 550 or e-mail: mail@prestonrentals.dk

Ganterud L20-3

A remote-controlled levelling hoist with proven and robust technology



The Ganterud L20-3 is based on a proven and robust technology in a new design, which, with its radio-controlled precision levelling, reduces installation time and increases safety. This radio-controlled levelling hoist is ideal for lifting items of all kinds that require accuracy and precision to navigate into place.

SPECIFICATIONS

| | |
|-----------------------|------------------------------|
| Lifting capacity: | Up to 20 tons |
| Chain wheel traction: | Chain wheel traction |
| Levelling length: | 6 m (3 m in both directions) |
| Levelling speeds: | 2 |
| Chain angle: | Up to 80° |
| Point of lubrication: | 1 |
| Total chain length: | Up to 6 m |
| Chain dimensions: | 60.5 x 20 mm |
| Own weight: | Approx. 395 kg |
| Height: | 1050 mm |
| Width: | 712 mm |
| Depth: | 623 mm |

Control system

| | |
|--------------------------------------|-------------------------|
| Radio range: | 100 m with a clear view |
| Motor voltage: | 24 VDC |
| Power consumption in hibernate mode: | 50 mA |
| Continuous power consumption: | 60 A – 1,400 watts |
| Peak power consumption: | 100 A – 2,400 watts |

Certification:


CE-marked product

Environmental requirements

| | |
|------------------------|------------------------|
| Operating temperature: | -20°C – +40°C |
| Storage temperature: | -20°C – +70°C |
| Relative humidity, RH: | 0 - 90% during storage |

Optional accessories

- Protective cover
- Chain kits in other lengths
- Extra batteries
- Transport packaging

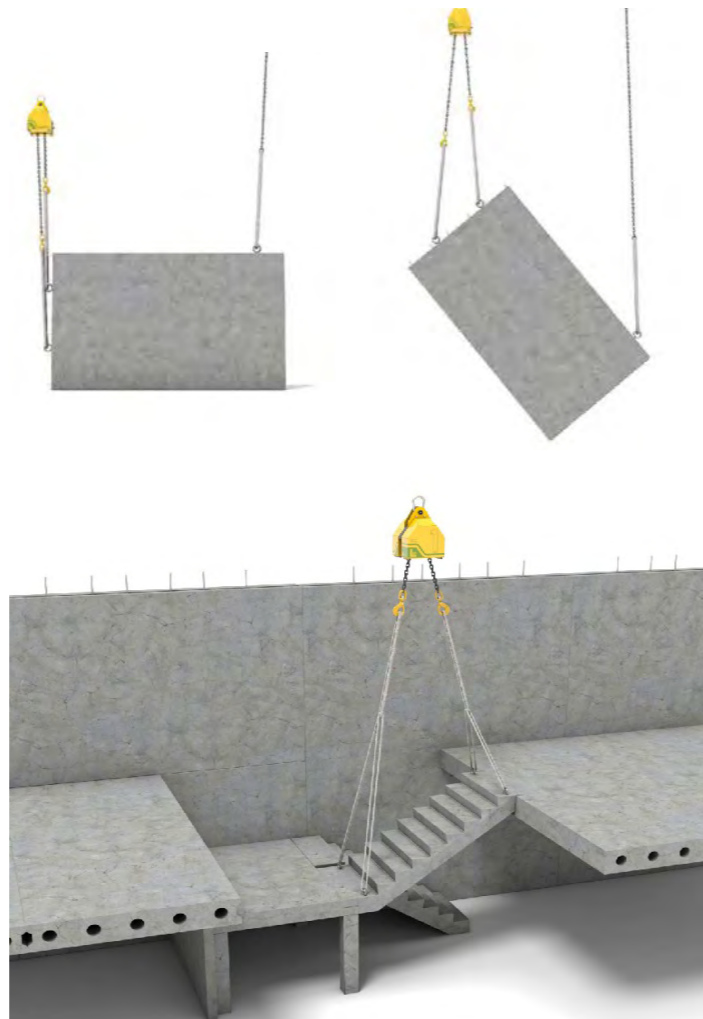

The Ganterud L20-3 makes heavy and cumbersome levelling work easy:

- Remote levelling of loads up to 20 tons
- Built-in battery = no need for power or hydraulics
- Intuitive operation
- Is delivered directly to the construction site and ready to use
- Positions elements with millimetre precision
- Remote control with a range of 100 metres and 2 speed levels



SuperDeck®

Patented "drawer-like" loading platform system
- easy to install and use



SuperDeck®



SuperDeck® is available in four sizes

SuperDeck® 2.2



Dimensions
 Length: 8500 mm
 Width: 2200 mm
 Height: 1202 mm
 TARE
 Weight: 2500 kg
 Capacity – max load in SuperDeck® 5000 kg.

SuperDeck® 2.6



Dimensions
 Length: 8500 mm
 Width: 2600 mm
 Height: 1202 mm
 TARE
 Weight: 2800 kg
 Capacity – max load in SuperDeck® 5000 kg.

SuperDeck® 3.2



Dimensions
 Length: 8500 mm
 Width: 3200 mm
 Height: 1202 mm
 TARE
 Weight: 3000 kg
 Capacity – max load in SuperDeck® 5000 kg.

SuperDeck® 4.2



Dimensions
 Length: 8500 mm
 Width: 4200 mm
 Height: 1202 mm
 TARE
 Weight: 3500 kg
 Capacity – max load in SuperDeck® 5000 kg.

Rear prop option now available

| SUPERDECK® | 2.2 | 2.6 | 3.2 | 4.2 |
|--------------------------|--------|--------|--------|--------|
| MAX. LOAD CAPACITY | 5000kg | 5000kg | 5000kg | 5000kg |
| TARE WEIGHT | 2500kg | 2800kg | 3000kg | 3500kg |
| MAX. OUTBOARD LENGTH | 5250mm | 5250mm | 5250mm | 5250mm |
| WIDTH OF DECK | 2200mm | 2600mm | 3200mm | 4200mm |
| PROP OR BOLT DOWN OPTION | 3 | 3 | 3 | 3 |

A new method for hassle-free handling of materials on the construction site

Loading and unloading materials at a construction site are both time-consuming and risky work. Streamlining this process provides immediate time savings in production. That's why PRESTON RENTALS® is now introducing a brand-new method that simplifies and enhances logistics.

This patented innovation is designed to simplify the handling of materials, especially on multi-level construction sites. The SuperDeck® offers a "drawer-like" loading platform system that slides, significantly enhancing safety and reducing crane operating time.

Easy to set up in just a few minutes

Instead of using traditional scaffold and loading towers with material lifts, the PRESTON RENTALS® SuperDeck® principle is based on so-called sliding platforms that are easily mounted on the floors where materials need to be lifted in or out.

The sliding platform is easy to assemble and is lifted into place with a crane


In minutes, the sliding platform is securely fastened between the floor and ceiling using four stabilisers. The deck is extended, allowing materials to be lifted into the platform

by a crane, making both the construction material and machines accessible on the floor.

The sliding platforms can be installed on each floor and can be integrated with scaffolding. The sliding platform is available in four sizes and has a load capacity of five tons.

In Australia, where the system has been used for a long time, it has become evident that on SuperDeck® construction projects, crane efficiency has increased by 50%. Larger and heavier materials can be lifted with an increase of 71.4 percent. It has been possible to reduce lost working time related to waiting for materials through traditional material transport by 35.7%.

Overall, time used for the handling of materials has been reduced by up to 14.3%, and unforeseen delays from subcontractors have been minimised by up to 28.4%.



"This is a truly significant innovation for logistics work on a construction site. Everyone knows that the lifting of materials and the handling of heavy items in elevators and on scaffolding is complex and poses a safety risk today. With the SuperDeck®, you save both time and increase safety.

Additionally, the payload can be increased, and the system can be integrated with scaffolding.

Another advantage is that materials can be loaded directly from the truck onto the sliding platform at the construction

site, saving a considerable amount of time. A third interesting application is to use the sliding platforms for unloading demolition material.

Today, more and taller buildings are being erected in cities with multiple floors, often in dense urban areas with minimal space; here, the SuperDeck® is perfect for handling materials".

Martin Bo Bojesen
 Managing Director, Preston Rentals

SuperPropping™


Flexible and adjustable pillars

The Multiprop is well known and accepted in the construction industry. It has been used for many years, on many building and construction sites, and in many different applications.

SuperPropping™ provides a simple, fast, lightweight and flexible method of providing temporary support where needed.

SuperPropping™ has the ability to be arranged in a tower of four to enhance formwork systems to cope with larger concrete structures.

SuperPropping™ also has a range of attachments to carry beams and other structural items.

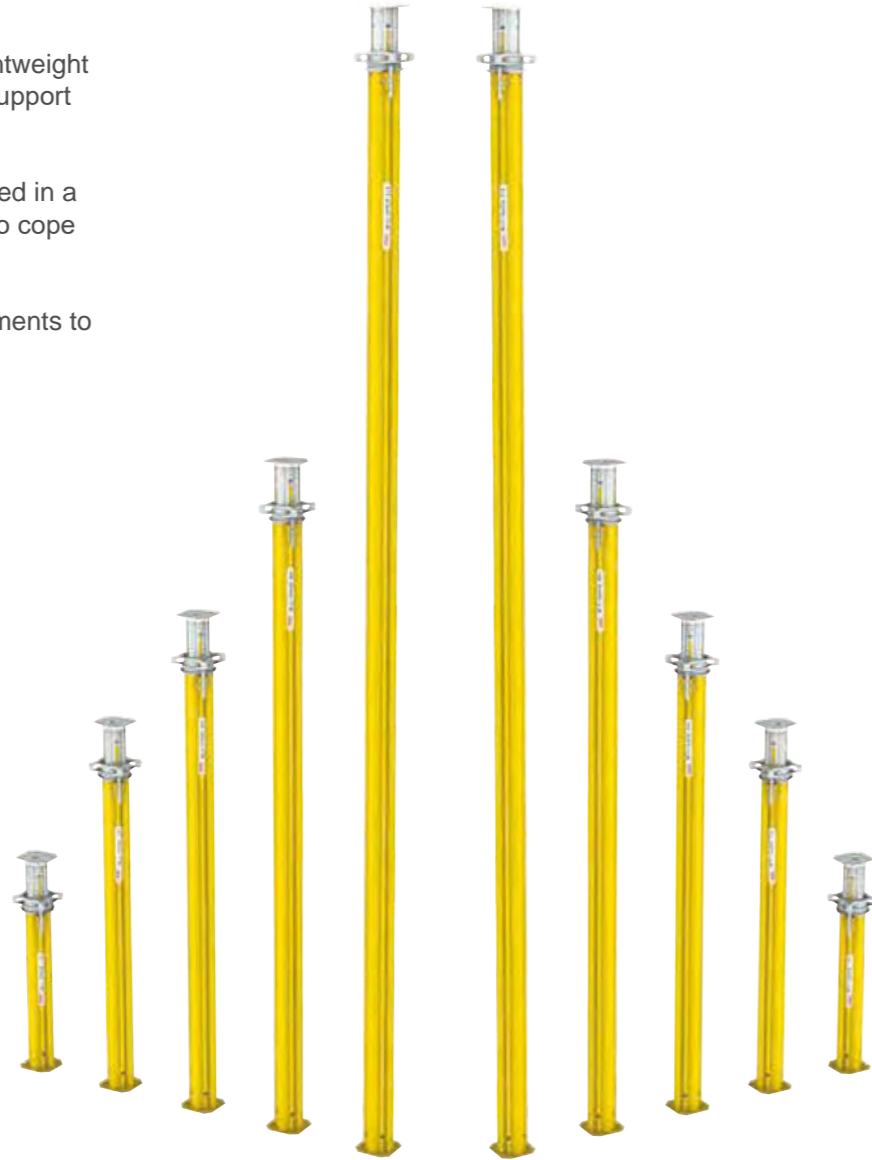

SPECIFICATIONS

MP250

Dimensions:
Length: 1450 – 2500 mm
Weight: 15,6 kg

MP350

Dimensions:
Length: 1950 – 3500 mm
Weight: 19,7 kg

MP480

Dimensions:
Length: 2600 – 4800 mm
Weight: 25,0 kg

MP625

Dimensions:
Length: 4300 – 6250 mm
Weight: 34,8 kg

Lifting Capacity:
7,5 tons at 1450 mm
6,2 tons at 2500 mm

Lifting Capacity:
9,0 tons at 1950 mm
4,4 tons at 3500 mm

Lifting Capacity:
7,3 tons at 2600 mm
2,6 tons at 4800 mm

Lifting Capacity:
4,5 tons at 4300 mm
2,1 tons at 6250 mm

Permissible Prop Load (kN) according to the Type Test

| Extension Length (m) | MP 250 L - 1.45 - 2.50 m | | MP 350 L - 1.95 - 3.50 m | | MP 480 L - 2.60 - 4.80 m | | MP 625 L - 4.300 - 6.25 m | |
|----------------------|-----------------------------|-------------------|-----------------------------|-------------------|-----------------------------|-------------------|------------------------------|-------------------|
| | Outer Tube Bottom | Inner Tube Bottom | Outer Tube Bottom | Inner Tube Bottom | Outer Tube Bottom | Inner Tube Bottom | Outer Tube Bottom | Inner Tube Bottom |
| 1.45 | 73.3 | 76.2 | | | | | | |
| 1.50 | 73.3 | 76.2 | | | | | | |
| 1.60 | 73.3 | 76.2 | | | | | | |
| 1.70 | 73.3 | 76.2 | | | | | | |
| 1.80 | 71.7 | 76.2 | | | | | | |
| 1.90 | 68.6 | 76.2 | | | | | | |
| 1.95 | 67.0 | 76.2 | 88.3 | 87.4 | | | | |
| 2.00 | 65.4 | 76.2 | 88.3 | 87.4 | | | | |
| 2.10 | 63.8 | 74,6 | 83.0 | 87.4 | | | | |
| 2.20 | 62.2 | 73,0 | 77.7 | 87.4 | | | | |
| 2.30 | 61.1 | 70,5 | 72.9 | 86.6 | | | | |
| 2.40 | 60.6 | 67,0 | 68.6 | 85.1 | | | | |
| 2.50 | 60.0 | 63,6 | 64.4 | 83.5 | | | | |
| 2.60 | | | 61.9 | 80.7 | 85.9 | 71.4 | | |
| 2.70 | | | 59.3 | 77.8 | 81.2 | 71.1 | | |
| 2.80 | | | 57.5 | 74.9 | 76.5 | 70.8 | | |
| 2.90 | | | 55.7 | 71.9 | 71.8 | 70.4 | | |
| 3.00 | | | 54.3 | 68.3 | 67.1 | 70.1 | | |
| 3.10 | | | 52.9 | 64.6 | 63.0 | 69.4 | | |
| 3.20 | | | 51.4 | 60.0 | 58.9 | 68.6 | | |
| 3.30 | | | 49.8 | 55.4 | 54.8 | 67.9 | | |
| 3.40 | | | 46.4 | 50.3 | 52.5 | 66.2 | | |
| 3.50 | | | 42.9 | 45.1 | 50.2 | 64.5 | | |
| 3.60 | | | | | 47.9 | 62.8 | | |
| 3.70 | | | | | 46.0 | 58.6 | | |
| 3.80 | | | | | 44.2 | 54.4 | | |
| 3.90 | | | | | 42.3 | 50.2 | | |
| 4.00 | | | | | 40.4 | 46.9 | | |
| 4.10 | | | | | 38.5 | 43.7 | | |
| 4.20 | | | | | 36.6 | 40.4 | | |
| 4.30 | | | | | 34.8 | 38.2 | 56.2 | 44.6 |
| 4.40 | | | | | 32.9 | 36.0 | 54.7 | 44.6 |
| 4.50 | | | | | 31.1 | 33.7 | 53.1 | 44.6 |
| 4.60 | | | | | 29.3 | 31.5 | 50.9 | 43.8 |
| 4.70 | | | | | 27.4 | 29.3 | 48.8 | 43.0 |
| 4.80 | | | | | 25.6 | 27.1 | 46.4 | 42.1 |
| 4.90 | | | | | | | 43.8 | 41.2 |
| 5.00 | | | | | | | 41.2 | 40.3 |
| 5.10 | | | | | | | 38.6 | 38.8 |
| 5.20 | | | | | | | 36.1 | 37.3 |
| 5.30 | | | | | | | 33.8 | 35.9 |
| 5.40 | | | | | | | 31.9 | 34.5 |
| 5.50 | | | | | | | 29.9 | 33.1 |
| 5.60 | | | | | | | 28.4 | 31.6 |
| 5.70 | | | | | | | 26.9 | 30.1 |
| 5.80 | | | | | | | 25.5 | 28.6 |
| 5.90 | | | | | | | 24.3 | 27.0 |
| 6.00 | | | | | | | 23.1 | 25.4 |
| 6.10 | | | | | | | 22.0 | 24.1 |
| 6.20 | | | | | | | 20.9 | 22.8 |
| 6.25 | | | | | | | 20.4 | 22.1 |

MULTIPROPS are classified according to official approval as follows:

MP 250 = Class T 25 MP 480 = Class D 45
MP 350 = Class R 35 MP 625 = Class D 60

Note:

We recommend using the HD Wingnut Spanner, Item no. 022027, to release the loads > 60kN.
MULTIPROP 350 and 480 clamped in the Table Swivel Head or UNIPORTAL Head fitted to PERI tableforms have permissible load of MP 350 minimum 56 kN, MP 480 minimum 36 kN over the entire extension range.



We are specialists in hiring out efficiency equipment which will save you precious time and money on your project.

We are proud to be Denmark's leading hire company of compact cranes. Our success is due to our dedication and expertise in the industry as well as the contractor business.

Top Class Service

We will assist you right from the beginning of your project. In cooperation with our engineering partner, we can provide you with counsel and calculations which will give you a perfect picture of the various options.

A World of Experience

We have great insight in how to handle and deliver the perfect result. This insight has been obtained through international cooperation with professional contractors worldwide.

Our Objective

Our objective is to deliver the best products and services to our customers while at the same time keeping it cost-effective. We continuously use the most effective and up-to-date technology, comply with the strictest security initiatives and focus on the environment.



Martin Bo Bojesen
Managing Director
Mobile: +45 42 156 305
Mail: mbb@prestonrentals.dk



Morten Bang
Head of SuperCrane™
Mobile: +45 21 440 555
Mail: morten.bang@prestonrentals.dk



Søren Andersen
Head of department
Mobile: +45 61 100 142
Mail: saa@prestonrentals.dk

Contact and Services

AARHUS:
Main Office

Preston Rentals Aps
Høgemosevej 29
DK - 8380 Trige

Phone: +45 31 640 550
Mail: mail@prestonrentals.dk

CVR-nr.: 39401835

SJÆLLAND:
Logistics

Preston Rentals Aps
Fabriksparken 11
DK - 2600 Glostrup

Phone: +45 31 640 550
Mail: mail@prestonrentals.dk

Find terms and conditions, brochures etc.
on our website:

