


# **HOEFLON** **VL500**

VACUUM GLASS  
SUCTION LIFTER




**HOEFLON<sup>®</sup>**

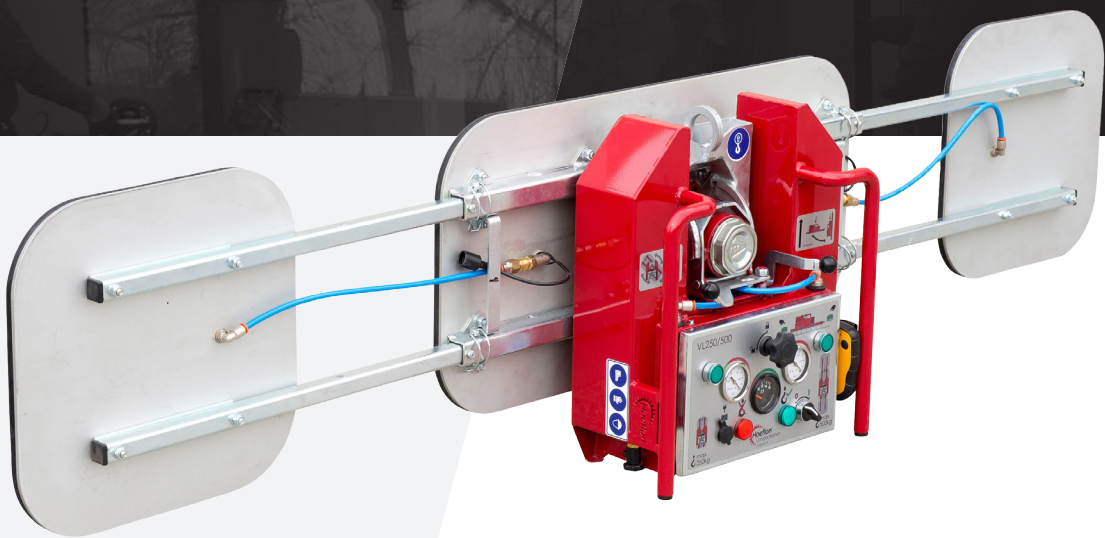

# HOEFLON VL500

Placing a glass panel has never been so safe and easy as with the VL500 vacuum glass suction lifter. Safe, because the glass suction lifter has been designed with a double vacuum circuit, double buffer vessel and double button operation. Easy, because the glass suction lifter fits on every Hoeflon mini-crane, has a high lifting capacity of up to 500 kg and is suitable for any size glass!

A unique feature is the radio remote control with a range of 50 metres. Installation of glass panels high above the ground is possible, and hard-to-reach places are accessible. User-friendly, ergonomic and safe!

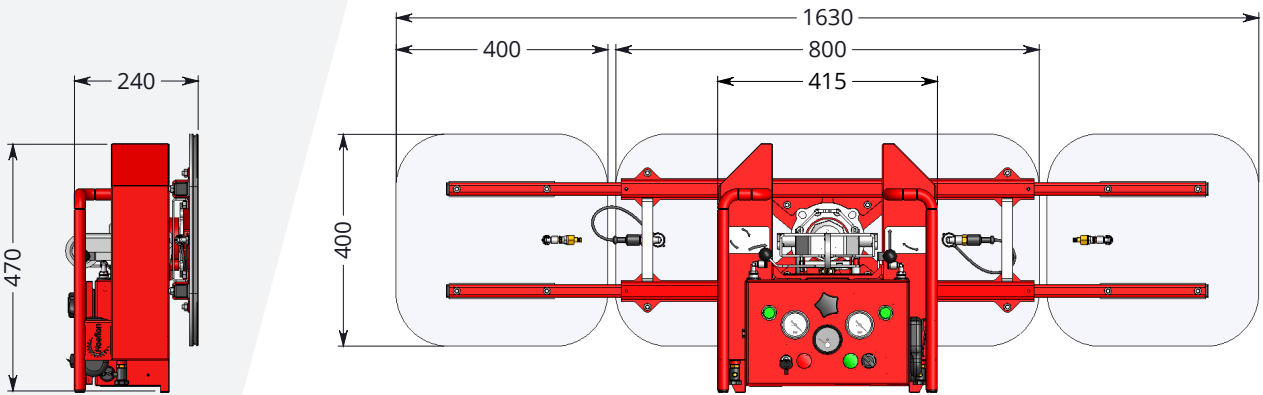


## Specifications

Capacity	500 kg 3 suction plates
	250 kg 1 suction plate
Dimensions	800 x 415 x 240 mm narrow 250 kg
	1630 x 415 x 240 mm wide 500 kg
	2070 x 415 x 240 mm extra wide 500 kg
Battery	12 V
Charger	230V 50Hz
Tilting range	90°
Rotation range	Endless with stop every 90°
Safety	Double vacuum circuit
	Double buffer vessel
	Double button operation
Indicators	Analogue voltmeter
	Analogue vacuum gauges
Max. wind speed	5.5 m/s
Weight	40 kg
	52 kg with accessories

## Accessories/Options

Remote control	50 m range
Transport cart	For safe and easy transport
Fitted cover	With handy storage compartment

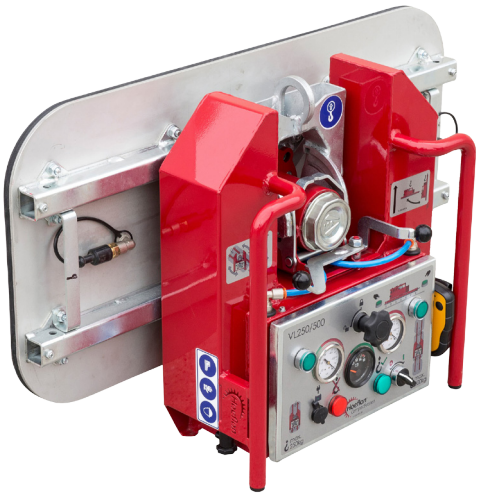






## VL500 SHORTLY

- › Low net weight
- › Battery for long use (9 hours)
- › Short attachment possible (bevelled buffers)
- › Endless rotation with stop every 90 degrees
- › 90 degree tilting range with lock at vertical position
- › Double circuit for extra safety
- › Handy transport cart

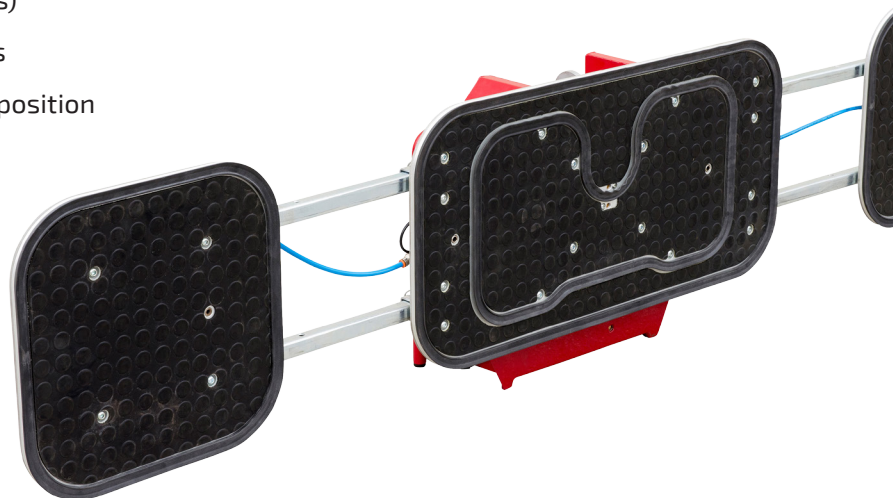

## WHY HOEFLON?

Hoeflon transport solutions are extremely versatile, making them perfect for moving heavy materials in close quarters or difficult-to-reach areas at project sites. We are happy to offer advice concerning the best solution for your situation. Ask us about the possibilities!

Your Hoeflon® dealer ►

**HOEFLON®**

Made in Holland

**Hoeflon International B.V.**

address Zwolleweg 2 3771 NR Barneveld, The Netherlands

tel. +31 (0)342 400288 email [info@hoeflon.com](mailto:info@hoeflon.com)

**HOEFLON.COM**